
REPORT No. 351

FULL SCALE WIND TUNNEL TESTS OF A PROPELLER WITH THE DIAMETER CHANGED BY CUTTING OFF THE BLADE TIPS

**By DONALD H. WOOD
Langley Memorial Aeronautical Laboratory**

REPORT No. 351

FULL SCALE WIND TUNNEL TESTS OF A PROPELLER WITH THE DIAMETER CHANGED BY CUTTING OFF THE BLADE TIPS

By DONALD H. WOOD

SUMMARY

Tests were conducted in order to determine how the characteristics of a propeller are affected by cutting off the tips. The diameter of a standard 10-foot metal propeller was changed successively to 9 feet 6 inches, 9 feet 0 inches, 8 feet 6 inches, and 8 feet 0 inches. Each propeller thus formed was tested at four pitch settings in the Propeller Research Tunnel of the National Advisory Committee for Aeronautics using an open cockpit fuselage and a D-12 engine.

A small loss in propulsive efficiency is indicated. Examples are given showing the application of the results to practical problems.

INTRODUCTION

In the early days of aeronautics it was common practice to adapt propellers to airplanes by cutting off the tips until the desired revolutions were attained. This procedure often led to freak designs and, of course, at times was the wrong thing to do; but the designer lacking test data and in many cases pressed for time and money, found no other course possible. With the advent of adjustable pitch metal propellers designed by later and more reliable methods, it may appear surprising that the practice still continues. The explanation is that a modern propeller will not be far wrong when initially selected, and with the higher cost of metal over wood propellers, it is sometimes more economical for manufacturers and customers to make changes in this manner.

Since accurate measurements of the characteristics had not previously been made, the tests described here were conducted in the Propeller Research Tunnel of the National Advisory Committee for Aeronautics at Langley Field, Va., with a view to determining quantitatively the propulsive efficiency, thrust, and torque of a propeller as its diameter was successively reduced. For each diameter the propeller was tested at four blade settings.

APPARATUS

The Propeller Research Tunnel, the balances, torque dynamometer, and testing methods have been described in Reference 1. The torque dynamometer

was installed in an open cockpit fuselage with a D-12 425-horsepower engine. This fuselage mounted on the balance ready for tests is shown in Figure 1.

The propeller used, designated as No. 3792, had adjustable aluminum alloy blades. It was furnished by the Bureau of Aeronautics of the Navy Department. Initially the diameter was 10 feet. The other diameters were obtained by cutting off 3 inches from each tip and then rounding with a circular arc tangent to the leading and trailing edges. The upper surface was then rounded off for about one-half inch in the larger diameter and 1 inch as the diameter became less and the thickness greater. The propellers thus obtained form a series of five diameters from 10 feet to 8 feet. The appearance of the blades is shown in Figure 2. Figure 3 is a detail drawing of the blade with the successive tip radii indicated. Nondimensional blade form and thickness curves derived from the drawing dimensions are given in Figure 4. Each diameter propeller was tested at pitch settings of 12, 17, 23, and 28 degrees at 0.75 of the radius. The resulting pitch distributions are plotted in Figure 5. The usual washout of pitch near the hub is to be noted and also the small differences in pitch distribution for the different diameters.

METHODS

The torque as measured is the net torque on the engine bearers. The engine was entirely inclosed in cowling which was supported free of the dynamometer. Consequently no correction for torque due to the slipstream is required and the torque as read is used in the computation of coefficients.

The resultant horizontal force of the propeller-body combination, which may be either a thrust or a drag, was measured on the regular thrust balance (Reference 1). This resultant force R may be considered as made up of the three horizontal components—

T —the thrust of the propeller operating in front of the body (the tension in the crank-shaft).

D —the drag of the airplane or fuselage alone (without the propeller) at the same air

velocity and density, that is, the same dynamic pressure q .

ΔD = the increase in drag of the fuselage with propeller, due to the slipstream.

This propulsive efficiency includes the increase in drag of all parts of the airplane (in this case the fuselage) affected by the slipstream, and also the effect of the body interference on the propeller thrust and power.

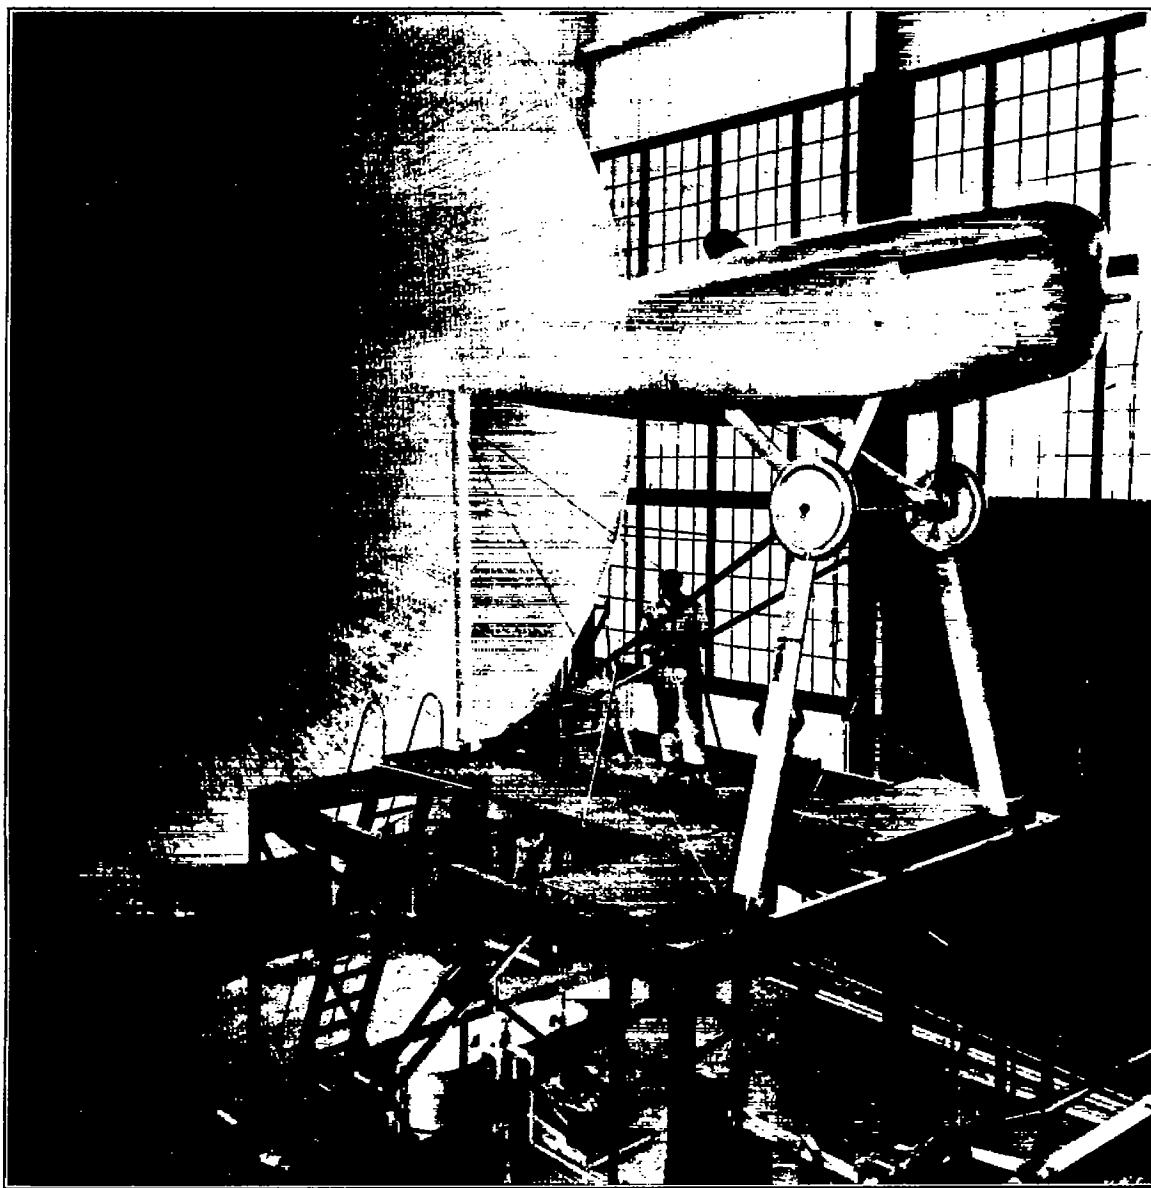


FIGURE 1.—Fuselage mounted for tests

$$\text{Then } R = T - D - \Delta D \quad (1)$$

To obtain the propulsive efficiency, which includes any propeller-body interference, an effective thrust is used which is defined as

$$\text{Effective thrust} = T - \Delta D$$

$$\text{or from (1)} \quad = R + D$$

The propulsive efficiency, then, is the ratio of the useful power to the input power, or

$$\text{Propulsive efficiency} = \frac{\text{effective thrust} \times \text{velocity of advance}}{\text{input power}}$$

RESULTS

The observed data are given in Table I with the standard nondimensional coefficients computed from them.

$$C_T = \frac{\text{effective thrust}}{\rho n^3 D^4}$$

$$C_P = \frac{\text{input power}}{\rho n^3 D^4}$$

$$\eta = \frac{\text{effective thrust} \times \text{velocity of advance}}{\text{input power}}$$

where D is the propeller diameter and n the revolutions per unit time. The coefficients for each diameter and pitch setting were plotted against $\frac{V}{nD}$. Typical examples of these plots are given in Figures 6 to 9, inclusive. The coefficients read from the faired curves at even values of $\frac{V}{nD}$ are given in Table II.

$$C_s = \sqrt[5]{\frac{\rho V^5}{P n^3}}$$

where V is the velocity of advance and P represents the power absorbed by the propeller. Propellers operating at the same value of C_s are operating under like conditions of power, velocity, and revolutions, and can be fairly compared. Figure 27 gives the en-

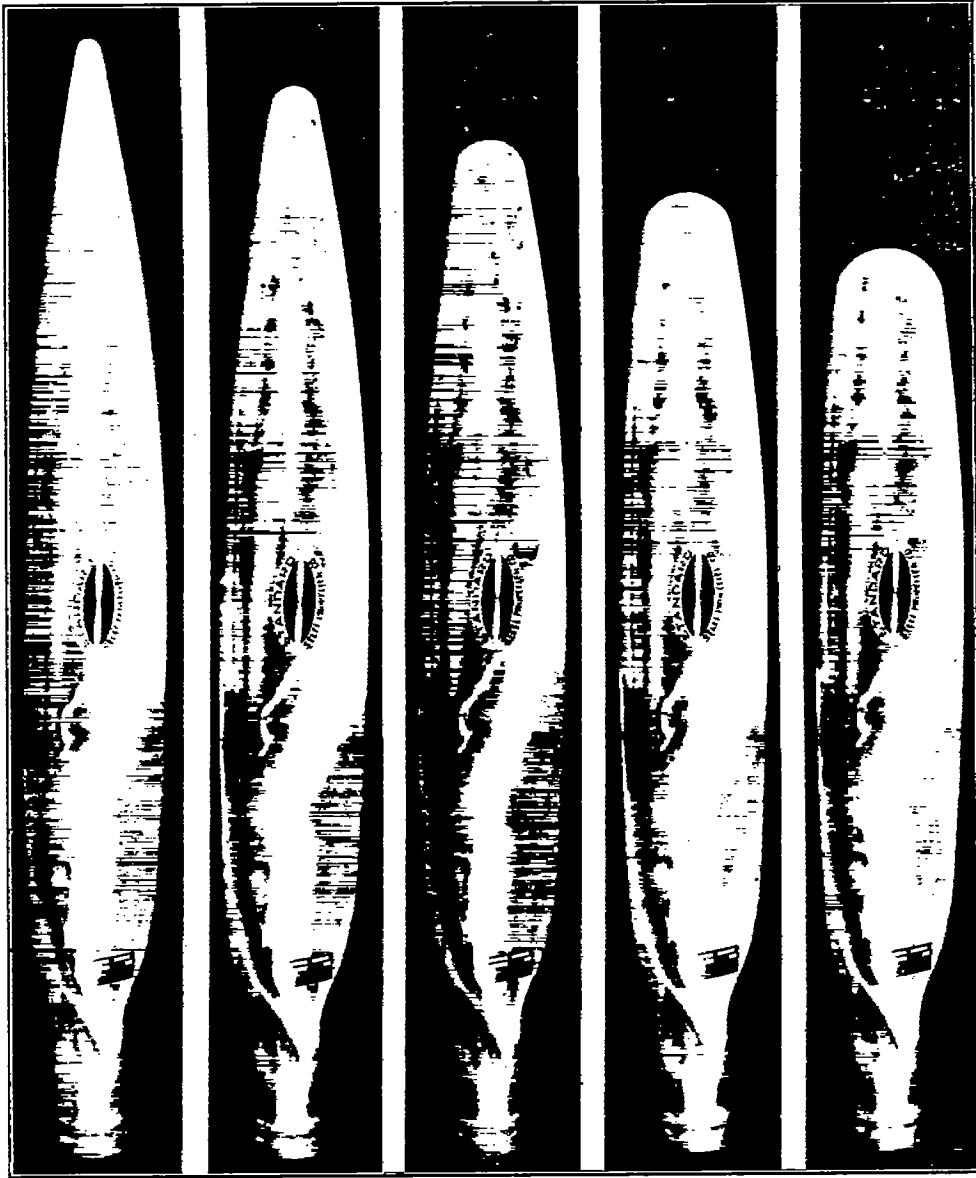


FIGURE 2.—Propeller series of five diameters

Figures 10 to 21, inclusive, give the thrust coefficient, power coefficient, and propulsive efficiency curves for the different diameters for comparison. The curves for one pitch setting for all the diameters are plotted on the same sheet.

In Figures 22 to 26, inclusive, the values of propulsive efficiency and $\frac{V}{nD}$ are plotted against the coefficient

velope of the efficiency curves of Figures 22 to 26, inclusive, and also the $\frac{V}{nD}$ for maximum efficiency plotted against the coefficient C_s .

DISCUSSION

When the diameter of a propeller is reduced in the manner described, changes in plan form and thickness

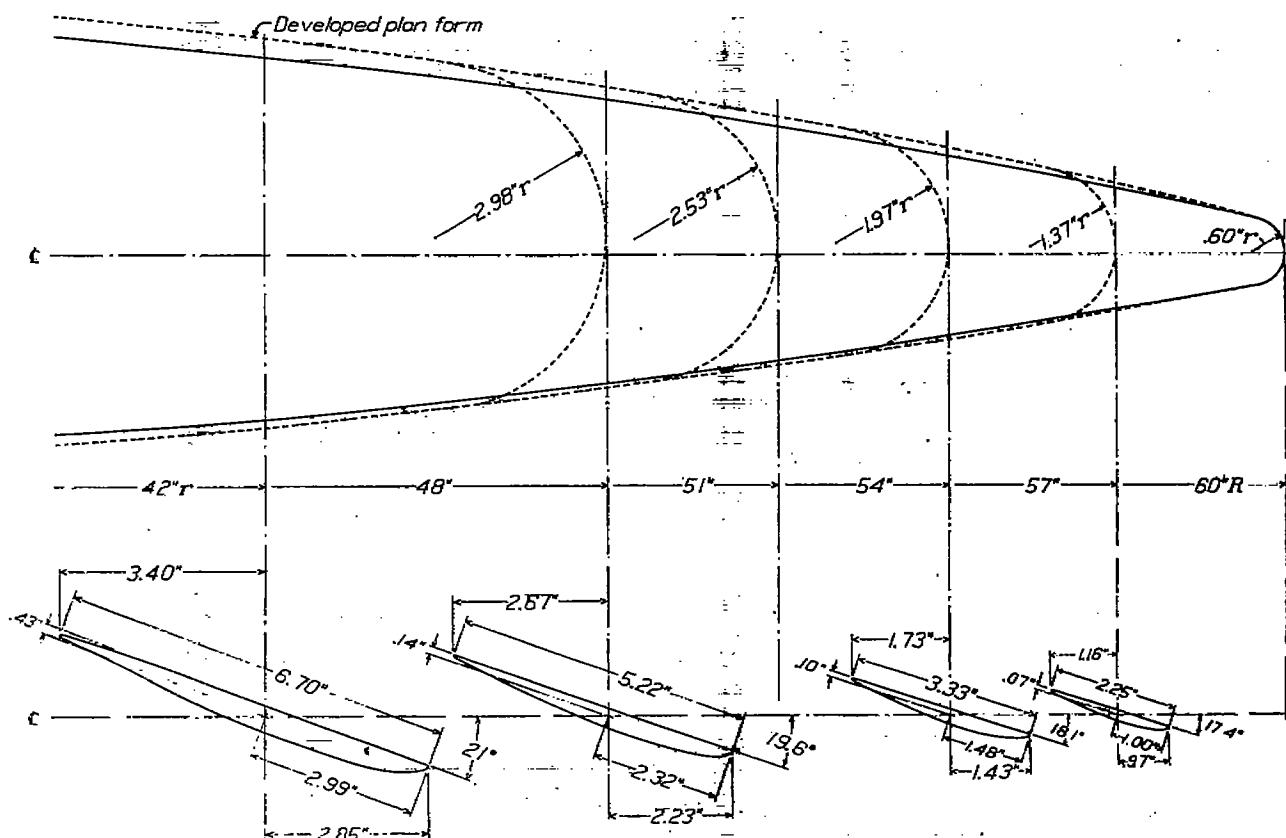


FIGURE 3.—Detail drawing with the successive tip radii indicated.
For ordinates see table, page 16.

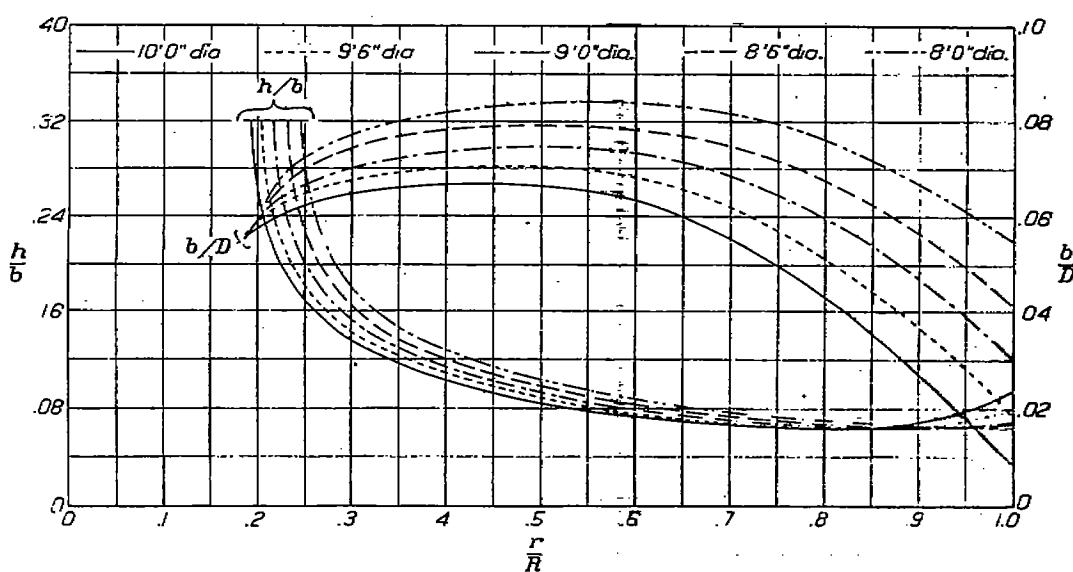


FIGURE 4.—Blade form curves propeller No. 3792. D =diameter. b =blade width. h =blade thickness. R =tip radius= $D/2$. r =radius

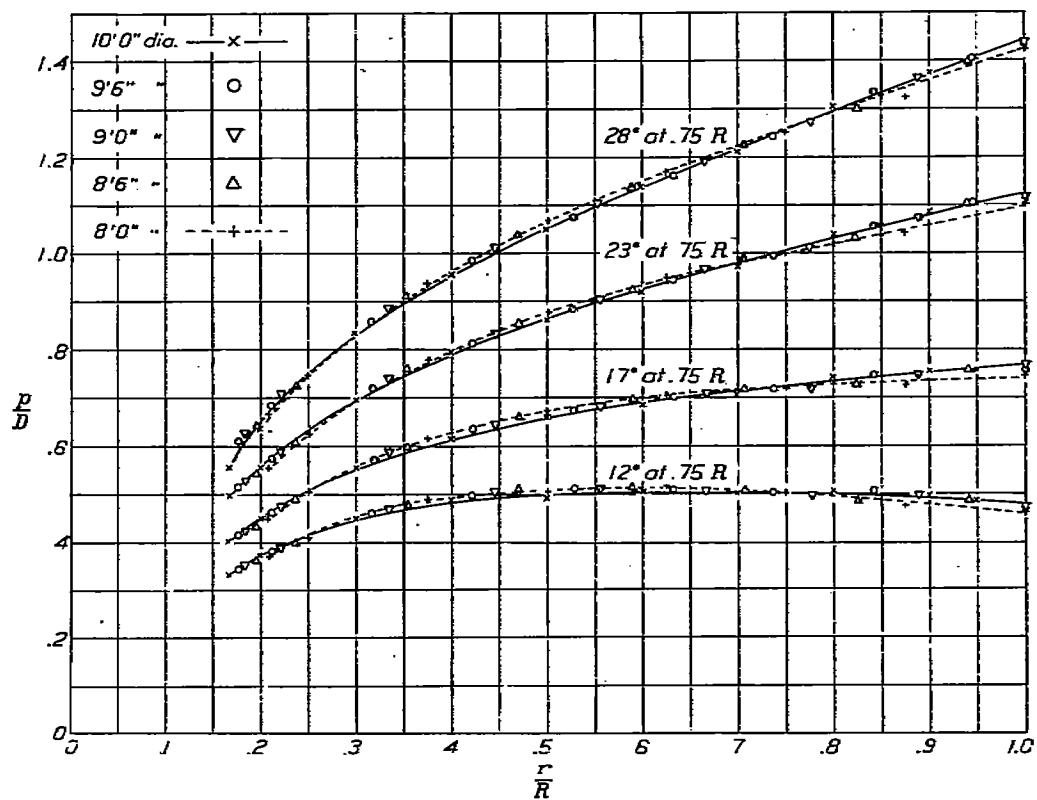


FIGURE 5.—Pitch distribution, propeller No. 3792

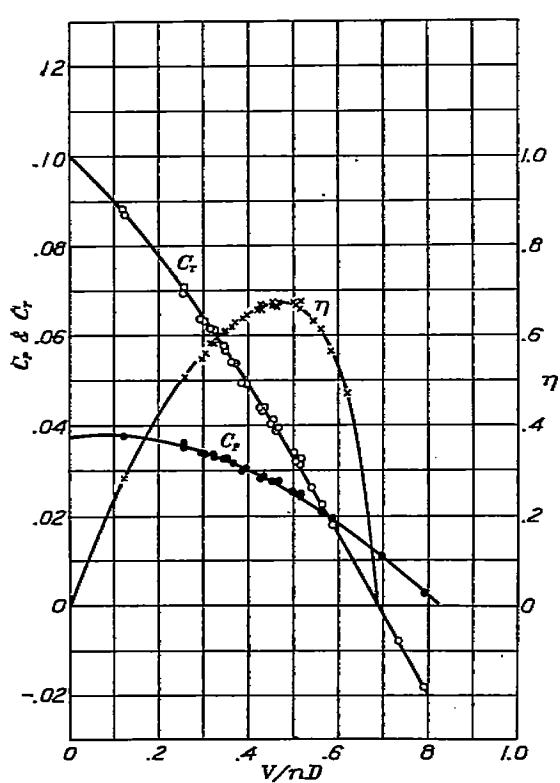


FIGURE 6.—Propeller No. 3792. Diameter, 3 feet (12° at 0.75 R)

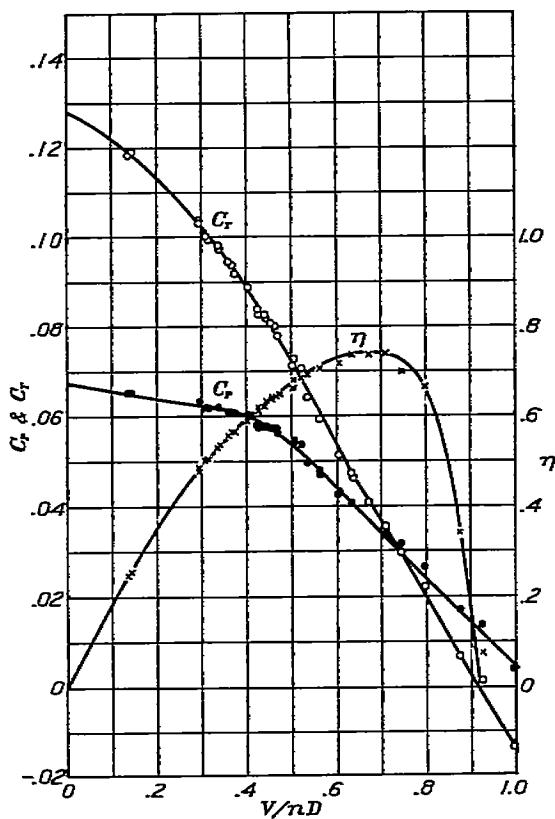
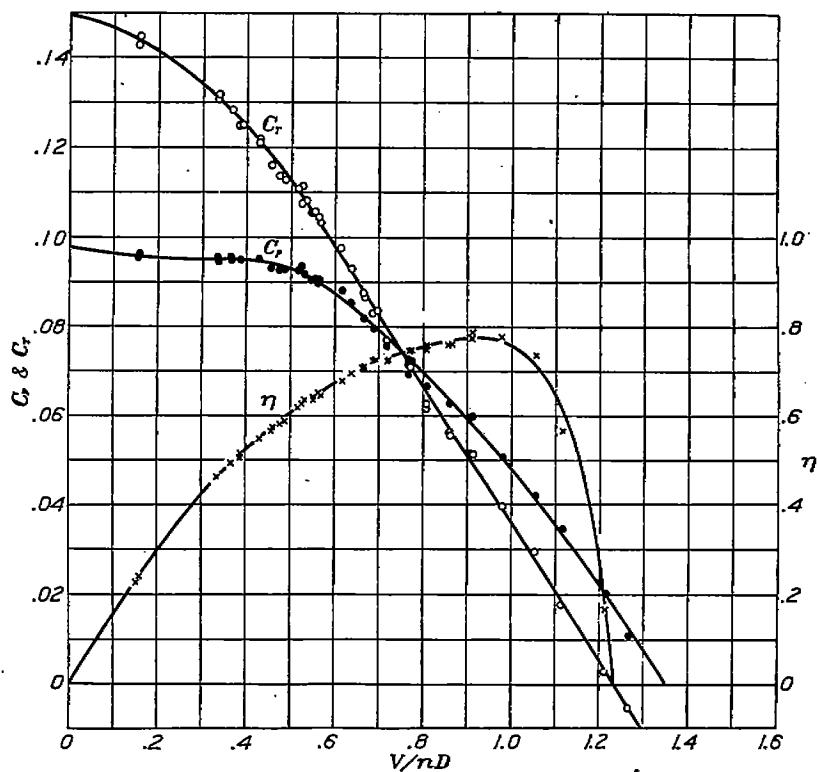
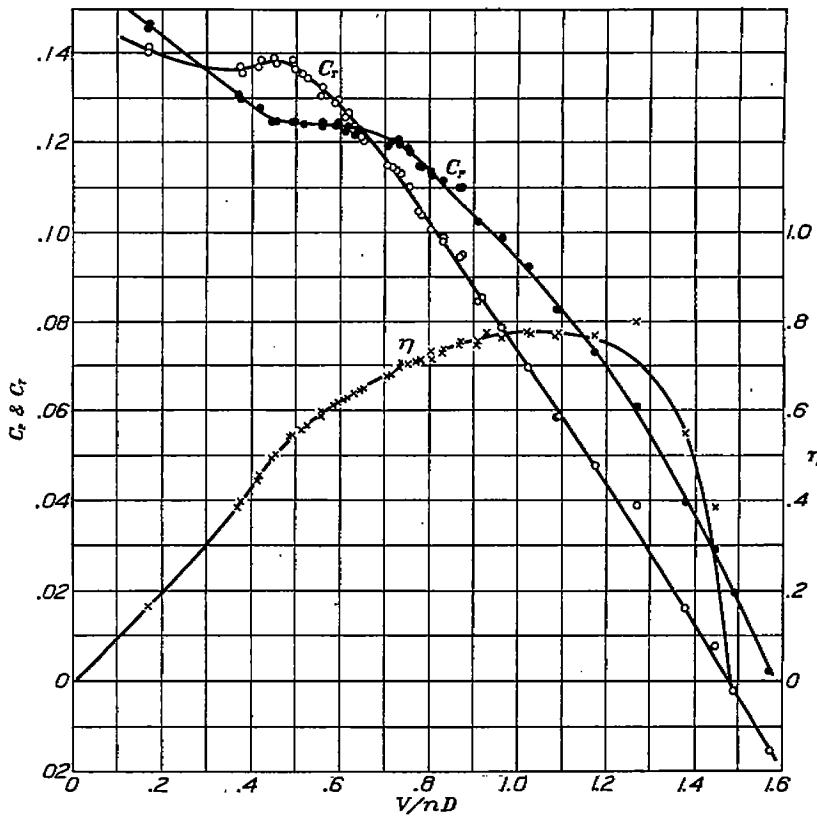
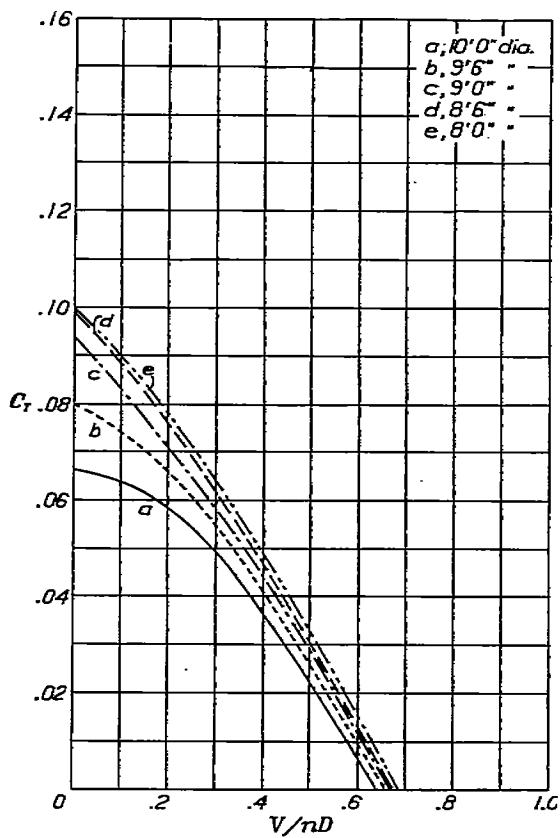
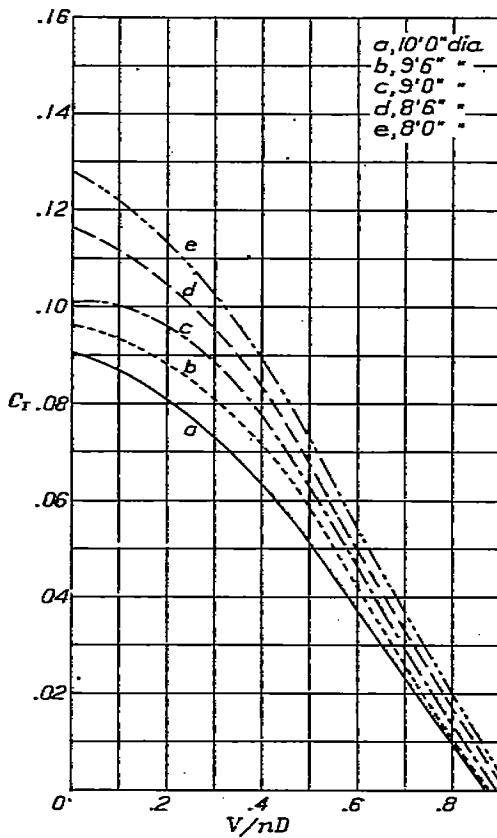
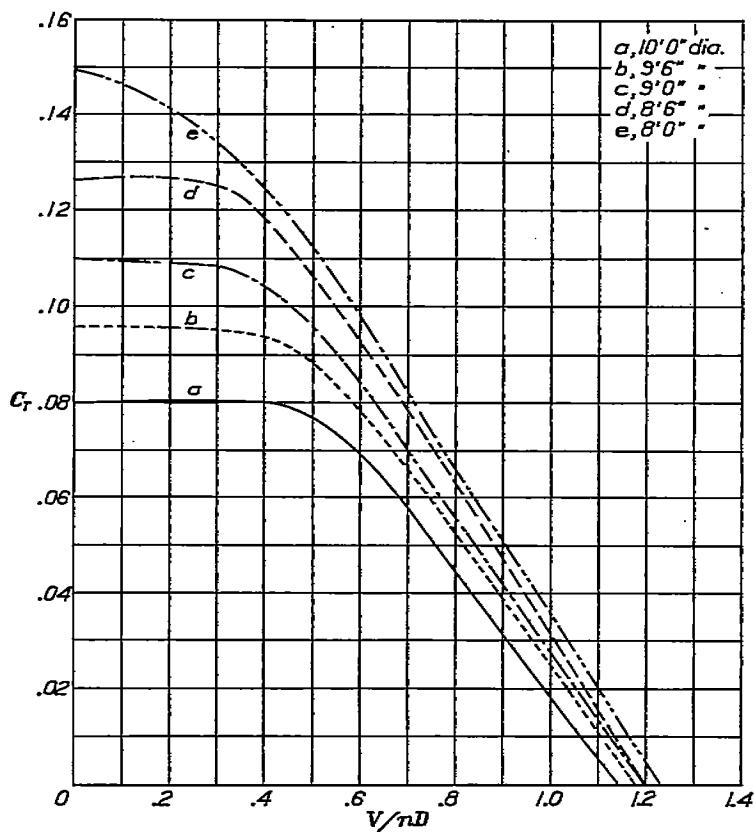
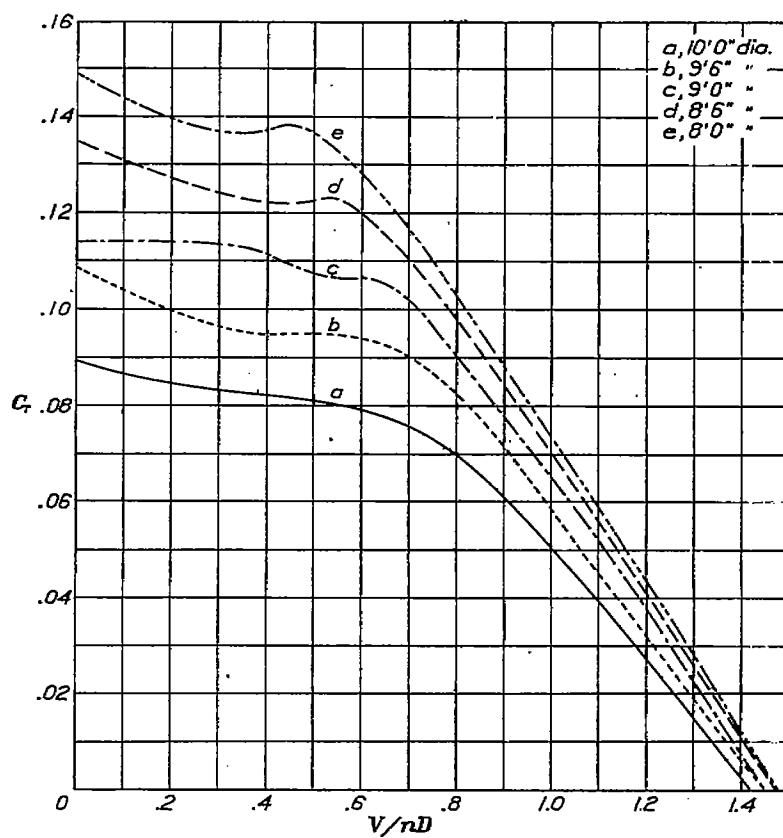
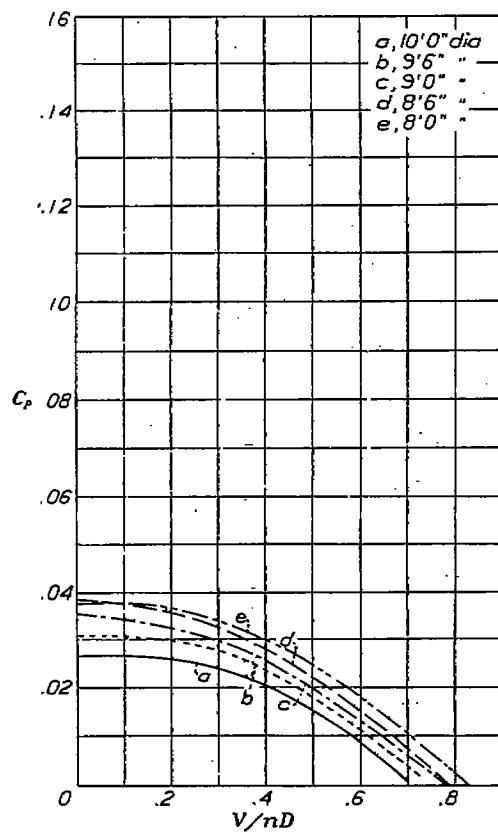
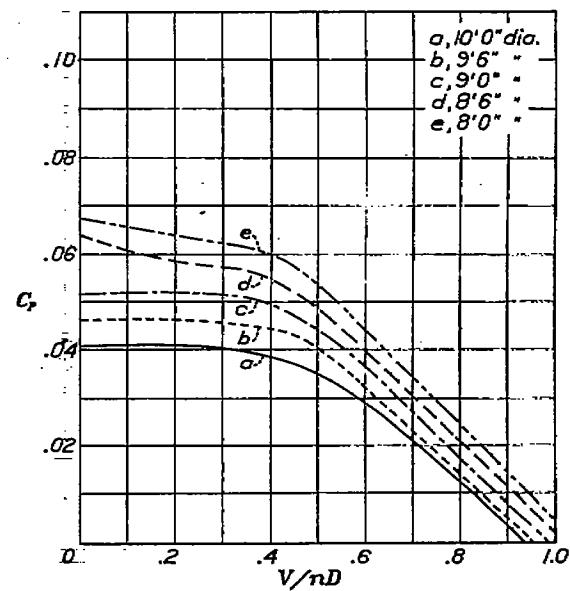


FIGURE 7.—Propeller No. 3792. Diameter, 8 feet (17° at 0.75 R)

FIGURE 8.—Propeller No. 3702. Diameter, 8 feet (22° at $0.75 R$)FIGURE 9.—Propeller No. 3702. Diameter, 8 feet (22° at $0.75 R$)

FIGURE 10.—Propeller No. 3792. (12° at 0.75 R)FIGURE 11.—Propeller No. 3792. (17° at 0.75 R)FIGURE 12.—Propeller No. 3792. (23° at 0.75 R)

FIGURE 13.—Propeller No. 3792. (28° at $0.75 R$)FIGURE 14.—Propeller No. 3792. (12° at $0.75 R$)FIGURE 15.—Propeller No. 3792. (17° at $0.75 R$)

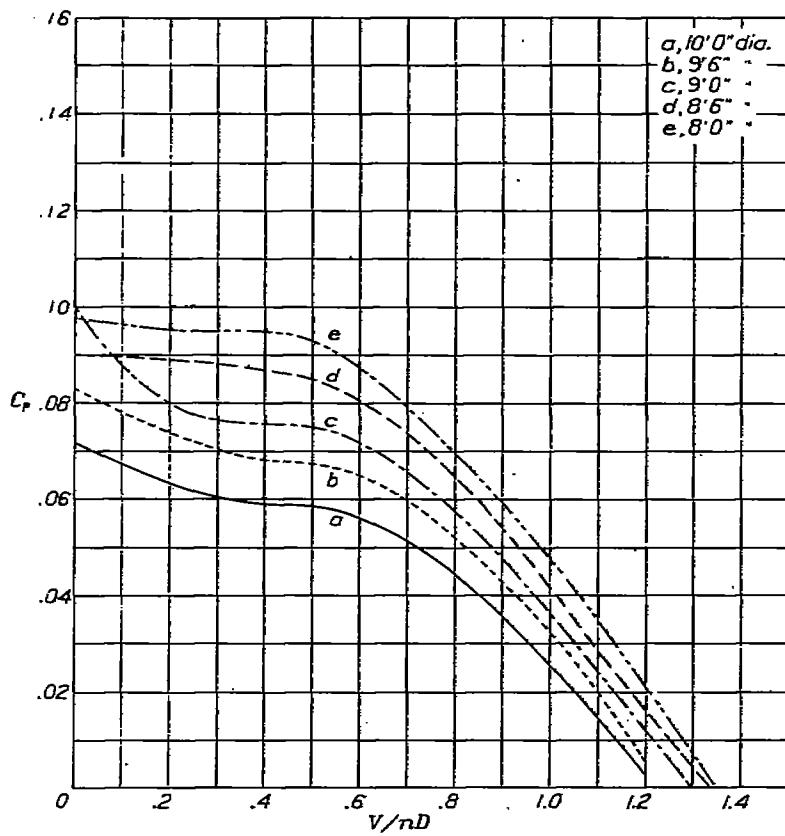


FIGURE 16.—Propeller No. 3792. (28° at 0.75 R)

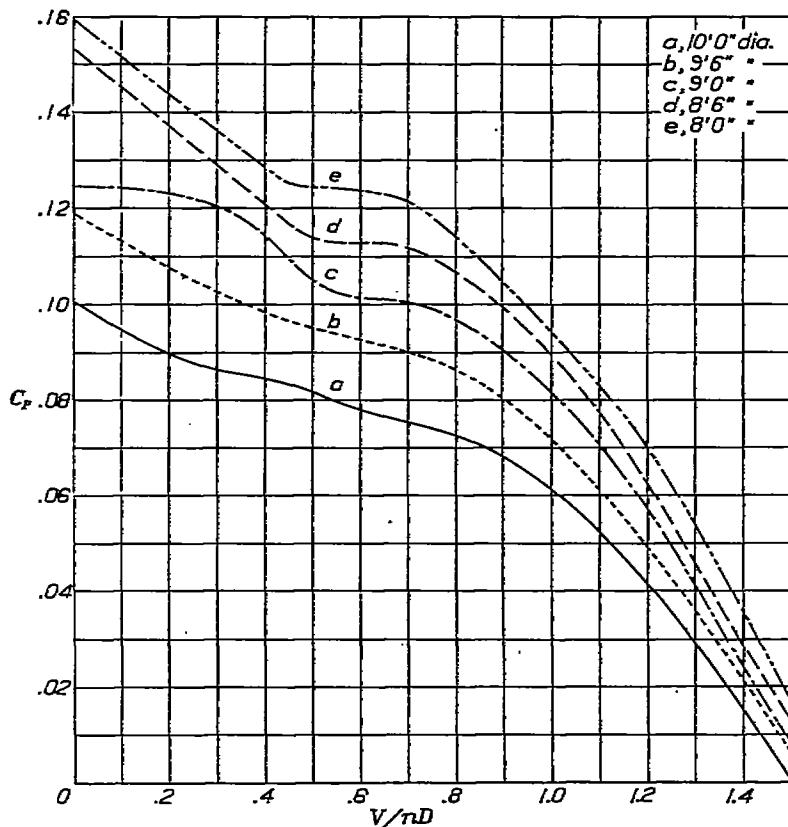
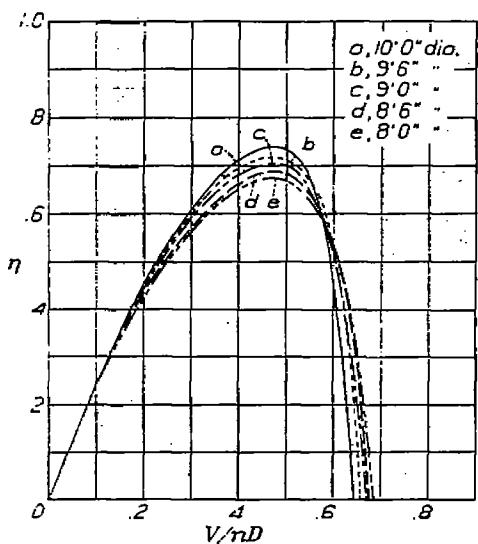
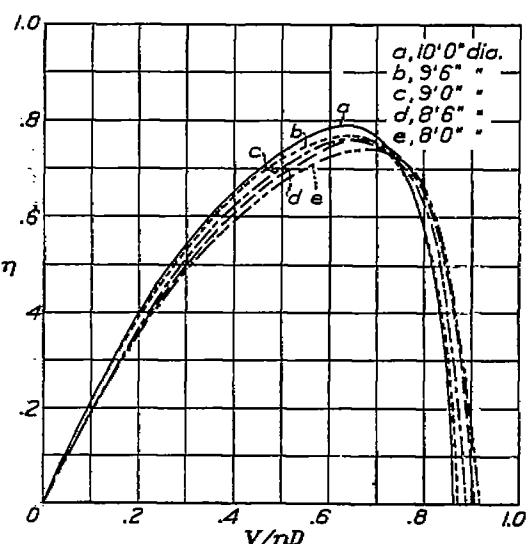
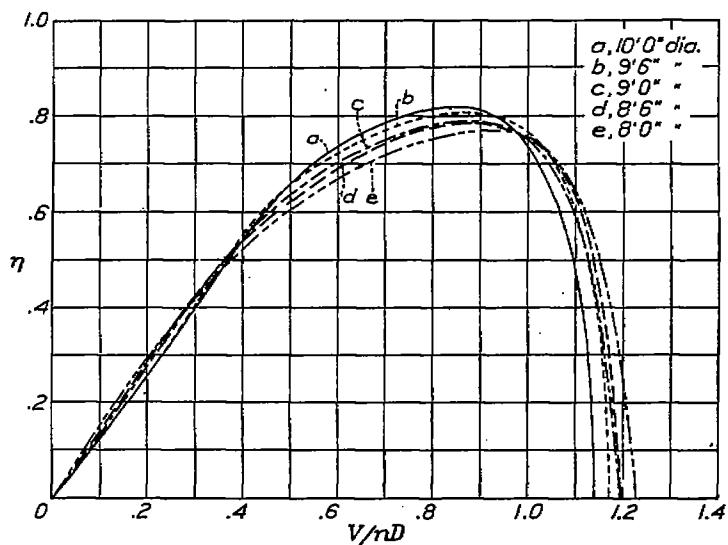
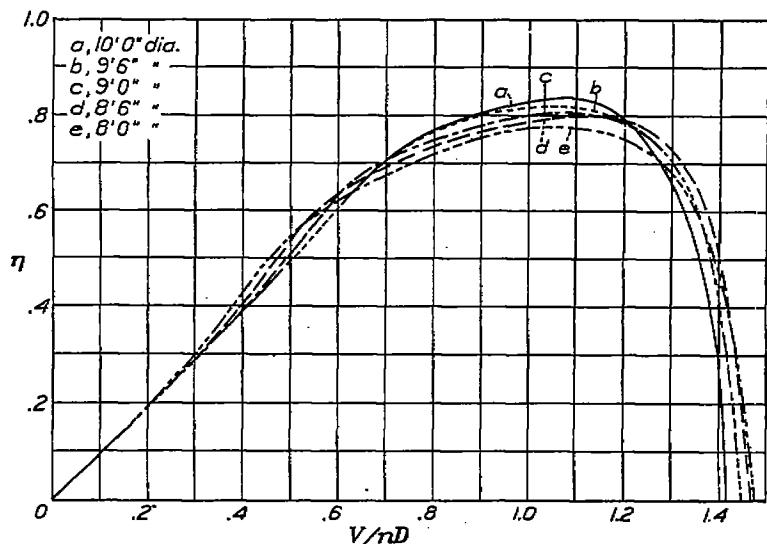


FIGURE 17.—Propeller No. 3792. (28° at 0.75 R)

FIGURE 18.—Propeller No. 3792. (12° at 0.75 R)FIGURE 19.—Propeller No. 3792. (17° at 0.75 R)FIGURE 20.—Propeller No. 3792. (23° at 0.75 R)FIGURE 21.—Propeller No. 3792. (23° at 0.75 R)

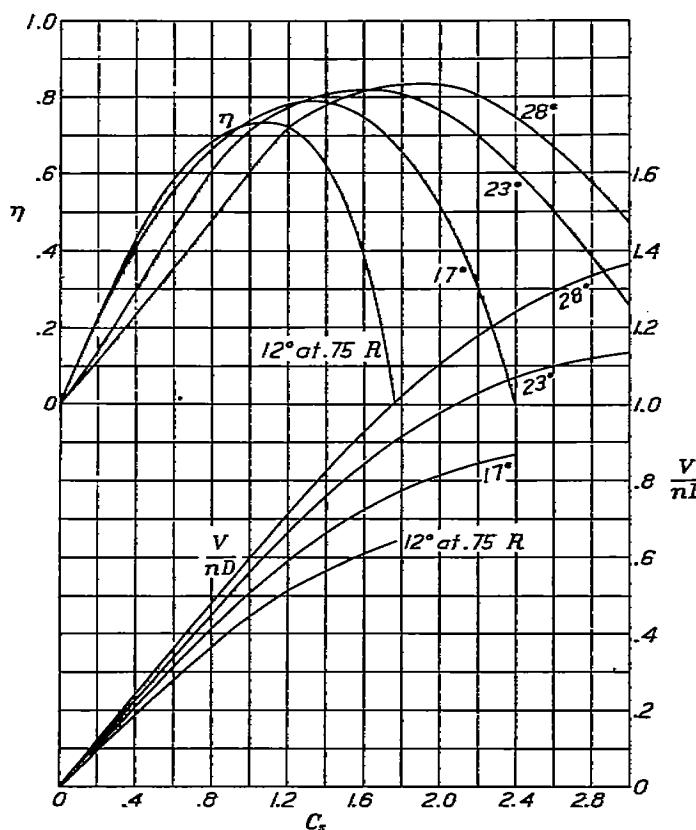


FIGURE 22.—Propeller No. 3792. Diameter, 10 feet

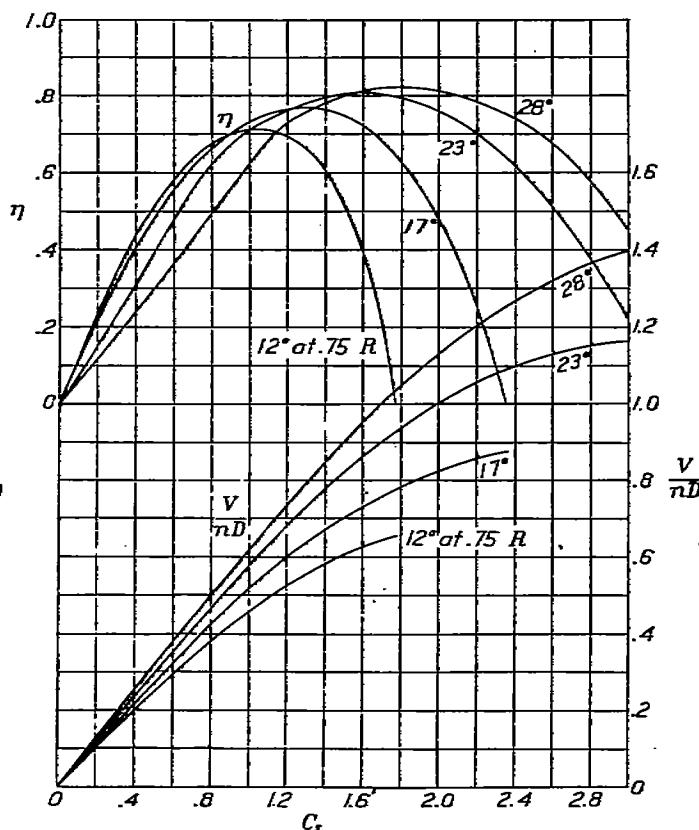


FIGURE 23.—Propeller No. 3792. Diameter, 9 feet 6 inches

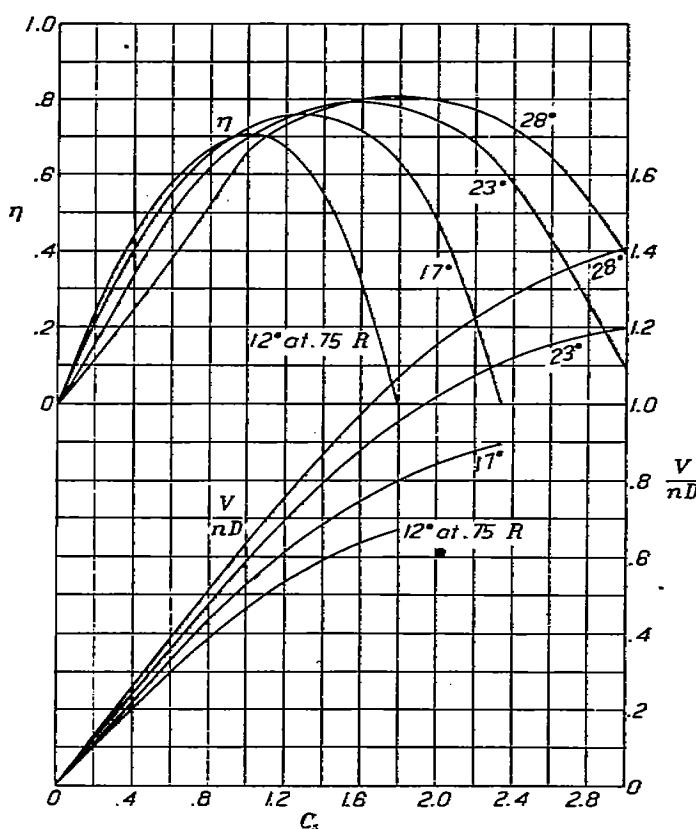


FIGURE 24.—Propeller No. 3792. Diameter, 9 feet

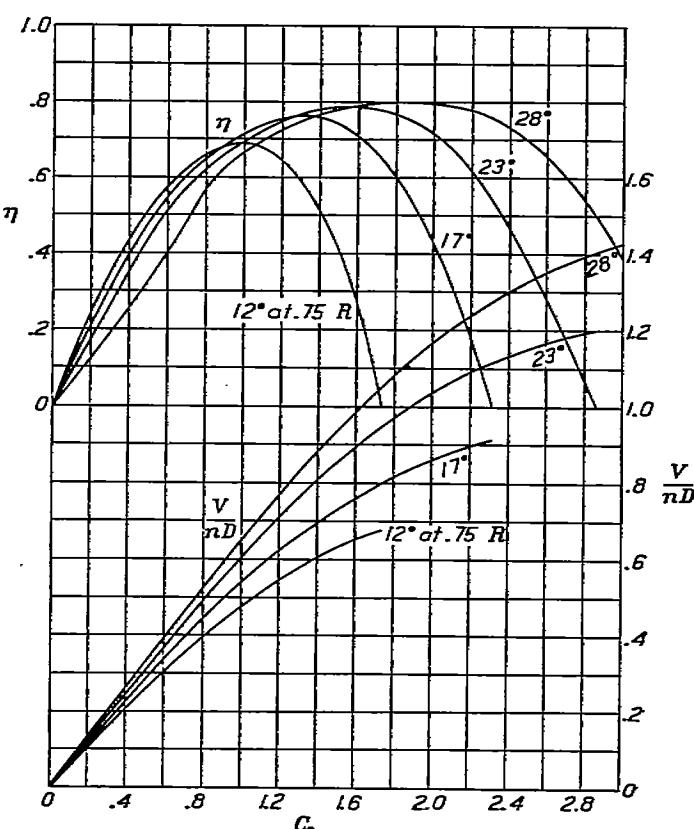


FIGURE 25.—Propeller No. 3792. Diameter, 8 feet 6 inches

result. (Fig. 4.) The blade width becomes more nearly uniform from hub to tip as the diameter is decreased. It is, therefore, impossible to attribute the change in characteristics entirely to any one of the variables, body interference, plan form, or thickness. Tests previously reported (Reference 2) were made with the diameter as the only variable and an approximation can be made as to how much of the change in body interference is due to change in the relative diameter of propeller and body only.

First considering all the propellers at the same pitch, it appears from Figures 18 to 21, inclusive, that each decrease of diameter causes a corresponding drop in maximum efficiency. The 20 per cent change in diam-

for the 8-foot diameter than for the 10-foot diameter. Likewise, the power coefficient is 60 per cent higher. At the lowest pitch setting (12°) the thrust coefficient is 33 per cent higher and power coefficient 56 per cent higher. The results are in agreement with those of Reference 3, although the differences are greater due to the wider range of thicknesses and blade widths in these tests.

However, it is usually the problem to find the propeller for a given engine power, revolutions and forward velocity. In this case the coefficient C_s connecting these variables is very useful. The value of C_s is fixed at the start for a given case, and from the diagrams, Figures 22 to 26, inclusive, the efficiency is

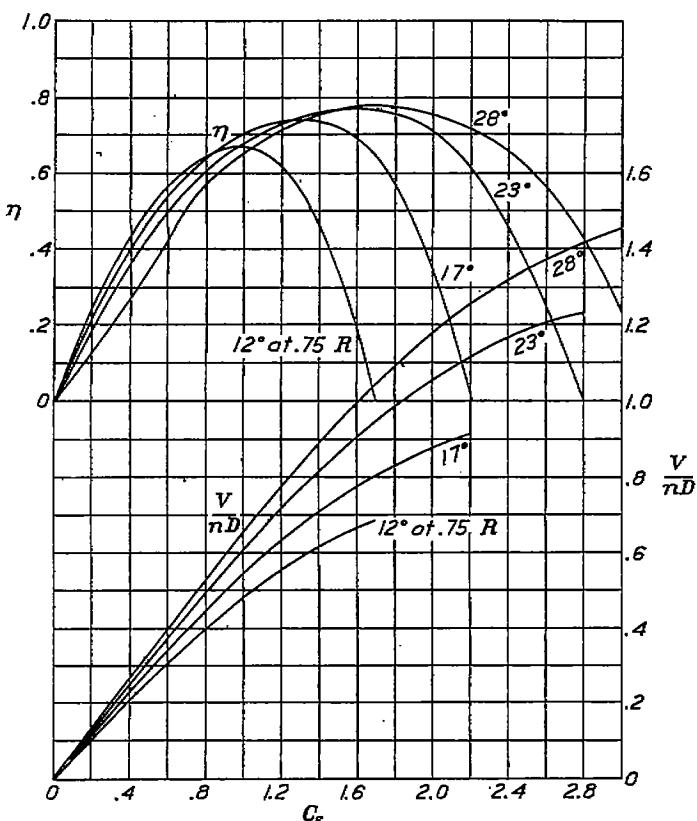


FIGURE 26.—Propeller No. 3792. Diameter, 8 feet

eter from 10 feet to 8 feet results in about 6 per cent drop in maximum efficiency. The indications are (Reference 2) that about $2\frac{1}{4}$ per cent of this is due to increase of body interference caused by the relatively larger body, the remainder, $3\frac{1}{4}$ per cent, to change of plan form and thickness. There is some lack of uniformity in the curves in that there are slight shifts in the $\frac{V}{nD}$ for maximum efficiency, but these are within practical limits and the experimental error.

As is to be expected from an increase of blade width near the tip and thickness near the hub, large increases of thrust coefficients and power coefficients are noted, (Figs. 10 to 17, inclusive). At the $\frac{V}{nD}$ for maximum efficiency the thrust coefficient is 51 per cent higher

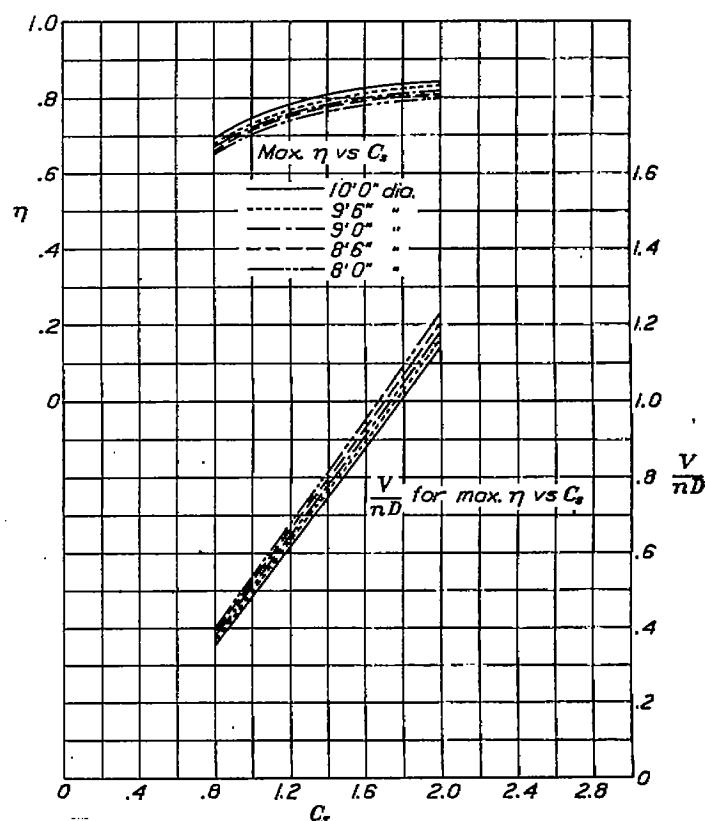


FIGURE 27

determined. The pitch setting required is obtained by interpolation between the settings plotted.

The application of these diagrams may be best illustrated by means of examples.

Example I:

An airplane with an engine developing 425 horsepower at 1,900 revolutions per minute flies at 150 miles per hour. A 10-foot propeller similar to No. 3792 is available. Should it be cut off and what will be the resulting efficiency?

$$\text{We have } C_s = \sqrt[5]{\frac{\rho V^5}{P n^2}}$$

Inserting the values from the problem and converting to consistent units:

$$C_s = \sqrt[5]{\frac{0.002378 \times (150 \times \frac{88}{60})^5}{425 \times 550 \times (\frac{1900}{60})^2}} = 1.394$$

$$\text{Also } \frac{V}{nD} = \frac{150 \times \frac{88}{60}}{\frac{1900}{60} \times 10} = \frac{220}{31.7 \times 10} = 0.695.$$

From the lower curves of Figure 22 at $C_s = 1.394$ and $\frac{V}{nD} = 0.695$, by interpolation the pitch setting required is found to be 19 degrees. At this setting and $C_s = 1.394$ the efficiency is found to be .795 from the upper curves.

The best efficiency at this C_s is .805 at 22 degrees setting. Referring to the lower curves at this setting and $C_s, \frac{V}{nD} = 0.745$.

Solving for D

$$D = \frac{220}{31.7 \times 0.745} = 9.34 \text{ feet.}$$

For best results then, a propeller geometrically similar to No. 3792, but 9.34 feet in diameter should be used. The difference between this and 10 feet suggests the possibility of advantage by cutting off the propeller.

From Figure 23, which applies to a propeller cut to 9.5 feet, at $C_s 1.394$ as before and now

$$\frac{V}{nD} = \frac{220}{31.7 \times 9.5} = 0.732$$

the efficiency is found to be 0.785 at 21° setting. This is 1 per cent less than the 0.795 efficiency for the 10-foot propeller. Therefore, the 10-foot diameter propeller set at 19° is better than the cut-down propeller. If the best propeller (9.34 feet at 22°) efficiency is corrected for increased body interference, using values from Reference 2, the efficiency is $0.805 - 0.008 = 0.797$. The 10-foot diameter propeller at hand is practically ideal for the purpose and should not be cut.

Example II:

An airplane fitted with an engine developing 300 horsepower at 2,000 revolutions per minute flies at 130 miles per hour. How should a 10-foot diameter propeller be cut to adapt it to the airplane?

$$\text{We have } C_s = \sqrt[5]{\frac{0.002378 \times (130 \times \frac{88}{60})^5}{300 \times 550 \times (\frac{2000}{60})^2}} = 1.268$$

$$\text{and } \frac{V}{nD} = \frac{130 \times \frac{88}{60}}{\frac{2000}{60} \times 10} = \frac{191}{33.4 \times 10} = 0.572.$$

From the diagrams, Figure 22, the propeller will have an efficiency of 0.750 at 14.5° setting. The best propeller would have an efficiency of 0.79 at a $\frac{V}{nD}$ of 0.66 with a diameter of 8.65 feet and a pitch setting of 20°. Correcting for body interference as before, the efficiency becomes $0.790 - 0.017 = 0.773$.

From the diagrams, Figure 25, for propellers cut to 8.5 feet diameter at $C_s = 1.268$ and

$$\frac{V}{nD} = \frac{191}{33.4 \times 8.5} = 0.674,$$

we find the efficiency to be 0.760 at a setting of 18.5°. Since the diameter is not critical, a 20 per cent change causing only 2½ per cent change of efficiency, it is sufficient to use this diameter. In fact, if the diagrams, Figure 27, for 8-foot diameter propellers are used in the same way, the efficiency drops to 0.74. The diagrams, Figure 24, for 9-foot diameter propellers give an efficiency of 0.76, the same as the 8.5-foot diameter.

For this application we may use the 10-foot diameter propeller cut down to 8.5 feet and gain about 1 per cent in efficiency. This propeller will be only $(0.773 - 0.76 = 0.013)$ 1.3 per cent less efficient than the best propeller, one of 8.65-foot diameter geometrically similar to the 10-foot diameter.

Example III:

An airplane is equipped with a 600-horsepower engine turning at 2,400 revolutions per minute. The estimated speed of the airplane is 180 miles per hour. How should a 10-foot diameter propeller be cut to adapt it to the airplane?

$$C_s = \sqrt[5]{\frac{0.002378 \times (180 \times \frac{88}{60})^5}{600 \times 550 \times (\frac{2400}{60})^2}} = 1.419$$

$$\text{and } \frac{V}{nD} = \frac{180 \times \frac{88}{60}}{\frac{2400}{60} \times 10} = \frac{264}{40 \times 10} = 0.660.$$

Figure 22 indicates that the propeller will have an efficiency of 0.765 at 16.5° setting.

If we cut the propeller to 8 feet the diagrams, Figure 26, apply.

$$C_s = 1.419 \text{ as before.}$$

$$\frac{V}{nD} = \frac{264}{40 \times 8} = 0.825.$$

Efficiency = 0.76 at 23° setting.

It appears that the cut-down propeller is practically as efficient as the 10-foot propeller.

It is possible to select another propeller which, at first sight, is better than either of the above. From the diagram, as in previous examples, we find that a

propeller 8.7 feet in diameter geometrically similar to the 10-foot propeller would have an efficiency of 0.805 when set at 22.5° . When corrected for increased body interference the efficiency is $(0.805 - 0.019) = 0.796$.

There is another factor, however, not covered by the above charts which must be taken into account. Tests, soon to be published, have shown that above 1,000 feet per second tip speed the efficiency falls off. The tip speeds follow:

$$10 \text{ feet diameter } \pi \times 10 \times 40 = 1,258 \text{ feet per second.}$$

$$8.7 \text{ feet diameter } \pi \times 8.7 \times 40 = 1,093 \text{ feet per second.}$$

$$8 \text{ feet diameter } \pi \times 8 \times 40 = 1,008 \text{ feet per second.}$$

The efficiencies computed for the 10-foot and 8.7-foot diameter propellers will not be realized in practice. The 8-foot diameter propeller, therefore, represents about the best propeller for the application.

When propellers are operating at high tip speeds the increased body interference and adverse effects of thickness and plan form of cut-off propellers are less than the tip-speed losses and a net gain in efficiency will result if a smaller diameter is used to reduce the tip speed.

CONCLUSION

- Changes of 20 per cent in the diameter of a 10-foot propeller due to cutting off the tips result in a loss of about 6 per cent in maximum propulsive efficiency at the same pitch setting.

- The drop in efficiency is accompanied by increases of from 30 to 50 per cent in thrust coefficient and from 56 to 60 per cent in power coefficient.

- A propeller adapted to a given engine and airplane by cutting off the tips will only be slightly less efficient than a specially designed propeller.

- The practice of cutting off propellers is justified by these tests.

LANGLEY MEMORIAL AERONAUTICAL LABORATORY,
NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS,
LANGLEY, VA., December 10, 1929.

REFERENCES

- Weick, Fred E., and Wood, Donald H.: The Twenty-foot Propeller Research Tunnel of the National Advisory Committee for Aeronautics. N. A. C. A. Technical Report No. 300 (1928).
- Weick, Fred E.: Full Scale Tests with a Series of Propellers of Different Diameters on a Single Fuselage. N. A. C. A. Technical Report No. 339 (1929).
- Weick, Fred E.: Full Scale Tests of Several Propellers Having Different Blade Forms. N. A. C. A. Technical Report No. 340 (1929).

Ordinates of sections at various radii for propeller blade per drawing, Figure 3

Stations in per cent chord	42" r upper	48" r upper	54" r upper	57" r upper
	Inches	Inches	Inches	Inches
2.5	.19	.14	.10	.07
5.0	.27	.20	.14	.11
10.0	.36	.27	.18	.14
20.0	.43	.33	.22	.17
30.0	.45	.34	.23	.18
40.0	.45	.34	.28	.18
50.0	.43	.33	.22	.17
60.0	.40	.30	.20	.16
70.0	.34	.28	.17	.13
80.0	.25	.19	.13	.10
90.0	.18	.12	.08	.06
Rad. L. E.	.05	.03	.02	.02
Rad. T. E.		.03	.02	.01
Chord	6.70	5.22	3.33	2.25

The chord is divided into 10 equal parts, or stations, with the one at the leading edge subdivided into halves and quarters.

TABLE I.—OBSERVED TEST DATA

Propeller No. 8792. Diameter, 10 feet

SET AT 12° AT 0.75 R.

<i>P</i>	V m. p. h.	N r. p. m.	Q lb. ft.	T lb.	C _T	C _P	V xD	<i>r</i>
0.002278	86.0	1,805	651	705	0.0343	0.0193	0.419	0.722
0.002278	88.2	1,810	658	712	0.0344	0.0193	0.419	0.726
0.002278	88.8	1,495	327	816	0.0224	0.0150	0.493	0.736
0.002278	91.5	1,820	637	674	0.0322	0.0191	0.428	0.720
0.002278	88.6	1,830	639	679	0.0321	0.0190	0.428	0.720
0.002278	88.9	1,830	637	810	0.0320	0.0193	0.409	0.731
0.002278	91.2	1,805	598	608	0.0297	0.0183	0.411	0.719
0.002278	91.8	1,805	599	621	0.0303	0.0183	0.447	0.740
0.002278	94.7	1,825	597	607	0.0290	0.0179	0.456	0.739
0.002278	95.0	1,825	595	604	0.0283	0.0179	0.458	0.735
0.002285	83.0	1,800	670	743	0.0364	0.0206	0.406	0.717
0.002285	83.5	1,800	672	745	0.0365	0.0206	0.408	0.724
0.002285	79.4	1,450	357	858	0.0260	0.0162	0.472	0.755
0.002285	80.0	1,820	707	802	0.0354	0.0214	0.387	0.695
0.002285	80.4	1,820	707	799	0.0353	0.0214	0.389	0.696
0.002285	77.2	1,800	378	383	0.0270	0.0167	0.453	0.730
0.002285	77.2	1,795	706	816	0.0401	0.0219	0.379	0.694
0.002285	78.1	1,815	709	813	0.0392	0.0214	0.379	0.694
0.002285	74.8	1,480	368	104	0.0292	0.0173	0.445	0.735
0.002285	73.4	1,810	726	821	0.0425	0.0226	0.356	0.693
0.002285	74.2	1,815	737	871	0.0422	0.0224	0.360	0.679
0.002281	68.3	1,490	405	443	0.0317	0.0182	0.403	0.703
0.002281	65.6	1,800	771	980	0.0471	0.0237	0.321	0.639
0.002281	62.8	1,805	775	982	0.0450	0.0237	0.306	0.620
0.002281	61.4	1,495	454	558	0.0396	0.0207	0.361	0.690
0.002284	81.7	1,800	789	1,007	0.0433	0.0242	0.302	0.615
0.002284	81.0	1,805	792	1,017	0.0435	0.0242	0.298	0.610
0.002284	88.2	1,520	496	620	0.0426	0.0214	0.337	0.671
0.002284	56.3	1,810	824	1,058	0.0526	0.0251	0.274	0.574
0.002284	56.8	1,810	826	1,084	0.0525	0.0252	0.276	0.575
0.002284	49.4	1,450	480	641	0.0465	0.0218	0.294	0.628
0.002270	24.9	1,810	871	1,239	0.0284	0.0284	0.121	0.258
0.002270	27.1	1,810	874	1,236	0.0268	0.0266	0.132	0.310
0.002270	22.4	1,490	518	875	0.0363	0.0235	0.133	0.360
0.002281	103.8	1,745	426	372	0.0193	0.0188	0.228	0.726
0.002281	103.2	1,660	324	249	0.0142	0.0116	0.547	0.670
0.002281	102.6	1,535	226	181	0.0057	0.0095	0.587	0.512
0.002281	102.0	1,450	160	48	0.0036	0.0070	0.619	0.316
0.002281	101.7	1,370	92	-15	0.0012	0.0048	0.652	-
0.002281	101.5	1,270	81	-84	0.0032	0.0019	0.704	-

Propeller No. 8792. Diameter, 10 feet

SET AT 23° AT 0.75 R.

<i>P</i>	V m. p. h.	N r. p. m.	Q lb. ft.	T lb.	C _T	C _P	V xD	<i>r</i>
0.002247	84.0	1,335	900	781	0.0722	0.0560	0.566	0.730
0.002247	84.5	1,325	987	782	0.0714	0.0565	0.561	0.709
0.002247	88.6	1,345	901	775	0.0689	0.0551	0.580	0.725
0.002247	88.6	1,340	959	770	0.0688	0.0552	0.583	0.726
0.002236	92.1	1,340	991	763	0.0635	0.0539	0.605	0.741
0.002236	91.6	1,340	988	768	0.0631	0.0536	0.601	0.736
0.002236	94.4	1,360	991	749	0.0659	0.0544	0.610	0.722
0.002236	94.4	1,355	989	750	0.0659	0.0544	0.612	0.711
0.002233	105.2	1,365	991	715	0.0624	0.0544	0.673	0.714
0.002233	104.4	1,360	991	715	0.0624	0.0544	0.673	0.714
0.002226	103.6	1,365	936	583	0.0562	0.0508	0.704	0.739
0.002226	104.0	1,225	736	501	0.0549	0.0499	0.746	0.806
0.002226	102.6	1,170	524	405	0.0479	0.0462	0.771	0.800
0.002226	103.2	1,100	505	316	0.0421	0.0424	0.826	0.820
0.002226	102.1	1,040	414	247	0.0369	0.0389	0.864	0.820
0.002226	101.6	965	300	162	0.0281	0.0324	0.926	0.906
0.002226	101.6	900	213	100	0.0199	0.0267	0.994	0.742
0.002226	101.6	825	113	42	0.0099	0.0176	1.052	0.613
0.002218	102.3	750	47	-2	-0.0005	0.0073	1.150	-
0.002218	102.3	770	30	-15	-0.0041	0.0051	1.170	-
0.002224	82.4	1,300	988	802	0.0768	0.0598	0.556	0.714
0.002224	81.4	1,300	989	797	0.0768	0.0595	0.551	0.706
0.002224	79.2	1,305	987	804	0.0768	0.0593	0.553	0.693
0.002227	79.0	1,303	989	802	0.0761	0.0593	0.553	0.690
0.002227	73.8	1,305	989	777	0.0736	0.0583	0.497	0.621
0.002227	75.2	1,310	986	781	0.0737	0.0582	0.505	0.640
0.002230	70.2	1,305	988	824	0.0789	0.0583	0.473	0.634
0.002230	69.2	1,310	987	824	0.0778	0.0582	0.483	0.619
0.002230	62.9	1,310	991	843	0.0794	0.0594	0.423	0.572
0.002227	63.5	1,300	987	842	0.0806	0.0591	0.430	0.563
0.002230	56.4	1,310	981	851	0.0801	0.0586	0.379	0.513
0.002233	51.6	1,300	987	836	0.0799	0.0591	0.360	0.496
0.002239	51.2	1,240	979	764	0.0801	0.0642	1.153	0.193
0.002239	52.2	1,240	981	764	0.0801	0.0747	1.157	0.195

Propeller No. 8792. Diameter, 10 feet

SET AT 23° AT 0.75 R.

<i>P</i>	V m. p. h.	N r. p. m.	Q lb. ft.	T lb.	C _T	C _P	V xD	<i>r</i>
0.002271	84.2	1,120	1,019	646	0.0782	0.0772	0.662	0.670
0.002271	83.6	1,110	1,009	644	0.0783	0.0773	0.663	0.673
0.002271	87.2	1,140	1,018	645	0.0758	0.0746	0.673	0.679
0.002271	88.4	1,180	1,012	642	0.0764	0.0756	0.685	0.695
0.002268	80.6	1,140	1,016	644	0.0762	0.0743	0.692	0.707
0.002268	90.6	1,125	1,013	641	0.0711	0.0763	0.707	0.715
0.002260	93.8	1,145	1,014	639	0.0742	0.0749	0.717	0.719
0.002357	103.3	1,140	1,016	618	0.0714	0.0735	0.701	0.709
0.002357	102.5	1,150	1,015	615	0.0710	0.0735	0.703	0.708
0.002357	102.5	1,150	1,015	614	0.0710	0.0735	0.703	0.708
0.002354	102.1	1,115	940	585	0.0695	0.0726	0.703	0.711
0.002354	102.4	1,050	824	457	0.0676	0.0719	0.708	0.708
0.002446	101.7	950	681	334	0.0661	0.0683	0.640	0.616
0.002449	101.4	900	518	270	0.0511	0.0615	0.628	0.625
0.002449	101.5	840	408	201	0.0437	0.0553	1.063	0.840
0.002449	101.2	800	340	161	0.0385	0.0511	1.115	0.840
0.002439	100.7	750	261	119	0.0205	0.0448	1.181	0.807
0.002439	100.5	710	193	72	0.0219	0.0366	1.248	0.741
0.002439	100.6	650	96	23	0.0268	0.0219	1.360	0.517
0.002439	100.6	600	14	-17	-0.0072	0.0087	1.475	-
0.002439	80.7	1,130	1,013	648	0.0778	0.0761	0.628	0.642
0.002439	79.3	1,130	1,012	643	0.0771	0.0761	0.627	0.625
0.002358	77.3	1,120	1,014	645	0.0785	0.0771	0.608	0.615
0.002353	65.4	1,120	1,012	643	0.0783	0.0755	0.587	0.594
0.002361	74.0	1,100	1,008	638	0.0793	0.0759	0.580	0.593
0.002361	71.0	1,110	1,012	641	0.0793	0.0760	0.583	0.595
0.002361	70.7	1,110	1,012	637	0.0789	0.0738	0.580	0.582
0.002353	65.4	1,090	1,017	638	0.0807	0.0806	0.580	0.581
0.002353	64.4	1,090	1,010	632	0.0808	0.0810	0.514	0.513
0.002353	62.2	1,090	1,014	631	0.0813	0.0822	0.502	0.50

TABLE I.—OBSERVED TEST DATA—Continued

Propeller No. 3792. Diameter, 9 feet 6 inches

SET AT 12° AT 0.75 R.

<i>P</i>	<i>V</i> m. p. h.	<i>N</i> r. p. m.	<i>Q</i> lb. ft.	<i>T</i> lb.	<i>C_T</i>	<i>C_P</i>	<i>V</i> $\frac{V}{nD}$	η
0.002369	86.3	1,890	653	718	0.0375	0.0225	0.423	0.705
.002369	83.5	1,890	657	742	0.0388	0.0227	0.409	.899
.002369	82.2	1,800	375	374	0.0273	0.0181	0.476	.718
.002368	89.1	1,900	651	709	0.0366	0.0223	0.434	.712
.002368	88.1	1,900	651	714	0.0369	0.0223	0.429	.710
.002358	89.1	1,900	632	688	0.0358	0.0217	0.434	.715
.002358	89.2	1,900	632	686	0.0357	0.0217	0.485	.715
.002358	102.1	1,900	459	457	0.0239	0.0169	0.498	.704
.002340	102.4	1,890	488	460	0.0249	0.0169	0.500	.714
.002340	88.6	1,910	688	783	0.0404	0.0234	0.405	.699
.002352	88.6	1,910	692	756	0.0403	0.0234	0.404	.696
.002352	81.3	1,595	362	349	0.0273	0.0179	0.472	.721
.002352	80.4	1,900	707	827	0.0431	0.0244	0.392	.693
.002352	80.7	1,900	707	824	0.0429	0.0244	0.398	.691
.002352	78.0	1,590	390	407	0.0303	0.0192	0.454	.717
.002352	57.8	1,900	724	866	0.0450	0.0249	0.370	.669
.002355	76.9	1,900	726	868	0.0450	0.0250	0.375	.675
.002355	74.7	1,580	403	437	0.0329	0.0200	0.438	.721
.002355	78.8	1,900	747	905	0.0471	0.0256	0.380	.662
.002355	75.3	1,505	751	904	0.0467	0.0256	0.386	.668
.002355	75.3	1,695	417	481	0.0340	0.0203	0.427	.715
.002355	71.9	1,910	764	940	0.0484	0.0261	0.349	.549
.002347	74.6	1,910	762	924	0.0476	0.0260	0.362	.663
.002347	78.0	1,580	403	498	0.0339	0.0206	0.433	.713
.002347	67.6	1,900	776	985	0.0513	0.0287	0.330	.654
.002350	67.0	1,900	774	987	0.0515	0.0286	0.327	.653
.002350	65.4	1,800	458	502	0.0413	0.0225	0.367	.670
.002350	58.0	1,890	782	1,066	0.0561	0.0274	0.284	.582
.002350	67.4	1,900	787	999	0.0520	0.0271	0.329	.681
.002350	56.4	1,570	483	613	0.0467	0.0244	0.338	.657
.002350	26.2	1,900	899	1,383	0.0719	0.0308	0.128	.298
.002359	26.8	1,900	900	1,372	0.0713	0.0309	0.128	.296
.002349	22.3	1,910	576	895	0.0720	0.0276	0.128	.385
.002349	100.6	1,800	416	876	0.0218	0.0160	0.618	.705
.002349	100.7	1,720	346	286	0.0182	0.0146	0.641	.575
.002349	100.7	1,610	263	186	0.0185	0.0126	0.579	.620
.002349	100.5	1,610	178	85	0.0070	0.0097	0.616	.446
.002349	100.1	1,390	91	-15	-0.0014	0.0058	0.666	-----
.002349	100.0	1,310	58	-52	-0.0057	0.0042	0.707	-----

Propeller No. 3792. Diameter, 9 feet 6 inches

SET AT 23° AT 0.75 R.

<i>P</i>	<i>V</i> m. p. h.	<i>N</i> r. p. m.	<i>Q</i> lb. ft.	<i>T</i> lb.	<i>C_T</i>	<i>C_P</i>	<i>V</i> $\frac{V}{nD}$	η
0.002308	88.3	1,420	1,024	845	0.0806	0.0644	0.580	.711
.002308	88.8	1,410	1,022	827	0.0798	0.0652	.584	.716
.002308	88.0	1,420	1,024	810	0.0774	0.0615	.568	.727
.002308	94.2	1,415	1,020	803	0.0770	0.0649	.618	.731
.002307	102.5	1,440	1,012	761	0.0709	0.0623	.660	.761
.002307	102.6	1,440	1,010	759	0.0706	0.0620	.660	.752
.002307	104.0	1,375	879	640	0.0652	0.0592	.700	.771
.002307	104.5	1,380	881	641	0.0651	0.0593	.701	.771
.002307	103.5	1,350	837	605	0.0641	0.0588	.710	.774
.002307	103.9	1,350	837	605	0.0641	0.0588	.714	.778
.002307	108.3	1,280	807	528	0.0599	0.0568	.781	.792
.002307	103.4	1,280	807	528	0.0599	0.0568	.749	.790
.002307	102.7	1,200	579	578	0.0507	0.0514	.791	.781
.002307	102.4	1,200	563	585	0.0514	0.0518	.780	.783
.002307	102.3	1,120	481	308	0.0475	0.0489	.816	.822
.002307	102.6	1,130	481	309	0.0468	0.0495	.840	.811
.002307	101.9	1,050	364	214	0.0376	0.0424	.897	.795
.002307	101.8	1,050	364	215	0.0377	0.0424	.896	.798
.002307	102.7	900	269	147	0.0300	0.0381	.960	.794
.002307	102.6	900	269	146	0.0300	0.0381	.960	.788
.002307	102.1	930	204	99	0.0222	0.0301	1.019	.750
.002307	102.3	925	199	97	0.0219	0.0297	1.028	.787
.002307	101.5	870	134	54	0.0138	0.0227	1.051	.650
.002307	101.2	800	39	-8	-0.0024	0.0177	1.172	-----
.002307	101.0	770	32	-14	-0.0045	0.0063	1.216	-----
.002307	82.0	1,400	1,032	845	0.0553	0.0574	.543	.687
.002307	79.5	1,300	1,022	849	0.0583	0.0578	.530	.679
.002307	79.2	1,305	1,028	875	0.0589	0.0575	.528	.677
.002307	79.7	1,395	1,027	870	0.0564	0.0572	.530	.680
.002307	76.3	1,400	1,031	849	0.0588	0.0671	.498	.636
.002307	76.4	1,395	1,027	800	0.0583	0.0673	.507	.666
.002307	65.0	1,390	1,029	934	0.0522	0.0678	.434	.591
.002307	67.4	1,390	1,028	920	0.0519	0.0678	.449	.609
.002307	60.3	1,390	1,022	947	0.0445	0.0633	.402	.556
.002307	62.8	1,390	1,026	930	0.0427	0.0678	.410	.575
.002307	22.0	1,305	1,022	849	0.0536	0.0769	.157	.197
.002307	24.9	1,300	1,018	839	0.0576	0.0765	.177	.226
.002307	20.6	1,310	1,024	835	0.0556	0.0767	.146	.184

Propeller No. 3792. Diameter, 9 feet 6 inches

SET AT 17° AT 0.75 R.

<i>P</i>	<i>V</i> m. p. h.	<i>N</i> r. p. m.	<i>Q</i> lb. ft.	<i>T</i> lb.	<i>C_T</i>	<i>C_P</i>	<i>V</i> $\frac{V}{nD}$	η
0.002331	82.4	1,735	1,064	1,061	0.0669	0.0436	0.440	.675
.002331	83.4	1,730	1,042	1,054	0.0688	0.0436	0.446	.684
.002328	89.1	1,760	1,039	1,022	0.0627	0.0420	0.469	.700
.002328	91.2	1,750	1,035	1,013	0.0628	0.0422	0.481	.713
.002328	92.2	1,770	1,038	1,014	0.0615	0.0416	0.482	.713
.002328	88.3	1,780	1,038	1,002	0.0600	0.0412	0.486	.708
.002329	97.7	1,795	1,039	980	0.0579	0.0406	0.504	.718
.002329	96.5	1,780	1,038	988	0.0490	0.0411	0.501	.720
.002314	106.8	1,840	1,034	939	0.0580	0.0386	0.537	.737
.002314	105.0	1,840	1,032	937	0.0529	0.0388	0.533	.730
.002314	105.2	1,750	848	748	0.0467	0.0350	0.557	.744
.002307	105.6	1,760	850	760	0.0475	0.0352	0.557	.754
.002307	105.8	1,650	709	611	0.0430	0.0330	0.591	.770
.002307	105.8	1,650	709	611	0.0430	0.0330	0.591	.770
.002307	104.2	1,555	575	473	0.0377	0.0338	0.623	.775
.002307	104.1	1,555	577	471	0.0378	0.0302	0.620	.768
.002302	103.5	1,450	429	331	0.0269	0.0269	0.661	.771
.002302	103.5	1,450	430	333	0.0304	0.0260	0.661	.774
.002302	103.6	1,380	324	226	0.0288	0.0226	0.710	.747
.002310	103.4	1,350	324	228	0.0289	0.0225	0.709	.753
.002310	103.3	1,260	231	137	0.0165	0.0184	0.759	.678
.002302	102.7	1,150	115	48	0.0366	0.0119	0.827	.500
.002302	102.2	1,050	52	-19	-0.0033	0.0059	0.901	-----
.002311	78.8	1,740	1,043	1,052	0.0684	0.0436	0.420	.659
.002311	80.4	1,740	1,038	1,048	0.0674	0.0434	0.428	.665
.002311	78.8	1,740	1,045	1,033	0.0697	0.0437	0.433	.626
.002311	76.8	1,720	1,039	1,039	0.0705	0.0444	0.411	

TABLE I.—OBSERVED TEST DATA—Continued

Propeller No. 3792. Diameter, 9 feet

SET AT 12° AT 0.75 R.

<i>P</i>	V m. p. h.	N r. p. m.	Q lb. ft.	T lb.	C _T	C _P	V nD	η
0.002272	84.4	1,920	587	670	0.0409	0.0250	0.415	0.679
.002272	85.0	1,930	589	677	0.0413	0.0250	0.418	0.690
.002272	85.6	1,935	593	677	0.0425	0.0199	0.492	0.690
.002274	88.3	1,920	588	621	0.0380	0.0239	0.454	0.670
.002274	88.6	1,930	589	624	0.0381	0.0239	0.455	0.693
.002274	90.0	1,990	549	601	0.0363	0.0234	0.442	0.695
.002274	90.4	2,000	554	607	0.0368	0.0234	0.442	0.695
.002274	89.0	1,700	315	299	0.0251	0.0184	0.512	0.683
.002274	94.5	3,020	554	594	0.0384	0.0231	0.457	0.700
.002274	94.8	2,025	554	594	0.0382	0.0230	0.453	0.701
.002275	81.7	2,020	626	748	0.0446	0.0261	0.398	0.679
.002275	81.0	2,020	630	755	0.0451	0.0261	0.392	0.677
.002275	78.9	1,710	374	398	0.0332	0.0185	0.451	0.687
.002275	76.6	2,000	645	794	0.0454	0.0275	0.374	0.658
.002275	76.8	2,000	645	795	0.0456	0.0275	0.375	0.663
.002275	74.0	1,680	382	432	0.0373	0.0230	0.481	0.699
.002275	71.5	2,000	653	823	0.0504	0.0278	0.360	0.634
.002275	71.1	2,000	655	837	0.0510	0.0278	0.349	0.638
.002275	69.8	1,700	414	456	0.0409	0.0243	0.401	0.676
.002275	66.8	2,000	655	903	0.0560	0.0291	0.326	0.616
.002275	65.0	2,005	659	921	0.0558	0.0290	0.317	0.610
.002275	62.9	1,710	436	546	0.0465	0.0250	0.369	0.683
.002275	61.7	2,000	704	944	0.0574	0.0288	0.302	0.581
.002275	59.8	1,990	609	955	0.0587	0.0300	0.294	0.575
.002275	57.3	1,730	478	631	0.0513	0.0271	0.324	0.613
.002271	55.2	2,010	720	1,017	0.0610	0.0302	0.269	0.544
.002271	53.2	2,010	723	1,038	0.0620	0.0303	0.259	0.530
.002271	51.1	1,710	456	673	0.0558	0.0252	0.292	0.578
.002274	26.6	2,020	318	1,346	0.0798	0.0339	0.129	0.903
.002274	26.6	2,020	318	1,345	0.0798	0.0339	0.129	0.903
.002274	21.9	1,706	513	901	0.0751	0.0290	0.126	0.316
.002277	102.1	1,980	463	455	0.0280	0.0200	0.504	0.705
.002277	102.1	1,900	391	380	0.0241	0.0182	0.525	0.604
.002277	101.0	1,800	323	269	0.0200	0.0168	0.519	0.651
.002277	100.9	1,700	244	167	0.0139	0.0142	0.550	0.570
.002277	100.9	1,600	180	94	0.0088	0.0119	0.616	0.451
.002277	100.7	1,500	120	27	0.0029	0.0090	0.656	0.212
.002277	100.9	1,406	69	-38	-0.046	0.0059	0.701	-----
.002277	100.2	1,320	24	-90	-0.024	0.0023	0.744	-----

Propeller No. 3792. Diameter, 9 feet

SET AT 23° AT 0.75 R.

<i>P</i>	V m. p. h.	N r. p. m.	Q lb. ft.	T lb.	C _T	C _P	V nD	η	
0.002281	85.0	1,450	1,004	859	0.0943	0.0770	0.562	0.688	
.002281	84.3	1,485	1,002	855	0.0934	0.0782	0.555	0.680	
.002273	92.2	1,620	1,006	851	0.0940	0.0734	0.581	0.681	
.002273	87.4	1,620	1,006	844	0.0882	0.0734	0.662	0.673	
.002273	90.3	1,530	1,003	840	0.0868	0.0725	0.577	0.660	
.002273	91.2	1,530	1,005	833	0.0860	0.0724	0.583	0.693	
.002270	93.4	1,530	1,008	826	0.0834	0.0726	0.567	0.702	
.002270	94.4	1,530	1,004	820	0.0845	0.0724	0.603	0.704	
.002259	103.7	1,560	1,009	793	0.0791	0.0704	0.650	0.731	
.002259	108.5	1,550	1,008	787	0.0796	0.0712	0.663	0.730	
.002259	104.2	1,500	988	679	0.0732	0.0688	0.579	0.744	
.002259	103.3	1,505	980	852	0.0732	0.0666	0.571	0.733	
.002259	102.9	1,420	769	571	0.0689	0.0646	0.508	0.755	
.002252	102.8	1,415	766	589	0.0682	0.0650	0.510	0.736	
.002252	102.3	1,355	668	493	0.0641	0.0619	0.538	0.765	
.002252	102.2	1,350	665	490	0.0641	0.0623	0.540	0.762	
.002252	101.6	1,280	595	418	0.0612	0.0607	0.575	0.782	
.002252	101.9	1,280	595	418	0.0612	0.0609	0.572	0.776	
.002252	101.6	1,200	498	323	0.0547	0.0571	0.528	0.703	
.002252	101.3	1,210	499	327	0.0544	0.0567	0.519	0.745	
.002252	101.3	1,150	376	234	0.0431	0.0453	0.541	0.769	
.002252	101.0	1,140	373	235	0.0440	0.0488	0.575	0.759	
.002252	101.6	1,080	292	173	0.0375	0.0433	0.537	0.794	
.002252	101.3	1,080	294	173	0.0375	0.0445	0.539	0.791	
.002252	100.9	930	195	103	0.0256	0.0333	1.000	0.758	
.002252	100.9	930	157	73	0.0206	0.0300	1.060	0.708	
.002252	100.9	840	53	11	0.0337	0.0152	1.175	0.393	
.002252	100.6	810	510	37	-12	0.0448	0.0096	1.215	-----
.002252	100.6	810	510	37	-12	0.0448	0.0096	1.215	-----
.002251	101.8	1,520	998	872	0.0616	0.0732	0.526	0.658	
.002251	101.8	1,500	995	867	0.0635	0.0749	0.530	0.662	
.002251	101.5	1,515	1,002	988	0.0648	0.0748	0.542	0.640	
.002251	101.3	1,515	980	987	0.0657	0.0751	0.540	0.649	
.002251	101.4	1,515	1,002	986	0.0662	0.0742	0.548	0.620	
.002251	101.3	1,510	996	980	0.0662	0.0743	0.541	0.624	
.002251	101.3	1,505	998	943	0.1010	0.0747	0.428	0.579	
.002251	101.5	1,505	994	935	0.1003	0.0745	0.432	0.582	
.002251	101.0	1,490	993	971	0.1063	0.0761	0.329	0.567	
.002251	22.3	1,425	993	921	0.1085	0.0821	0.150	0.210	
.002252	25.8	1,430	993	921	0.1092	0.0820	0.173	0.281	

Propeller No. 3792. Diameter, 9 feet

SET AT 23° AT 0.75 R.

<i>P</i>	V m. p. h.	N r. p. m.	Q lb. ft.	T lb.	C _T	C _P	V nD	η
0.002252	83.5	1,250	953	720	0.1072	0.1020	0.636	0.670
.002252	83.2	1,275	979	718	0.1078	0.1025	0.638	0.670
.002252	86.9	1,260	968	712	0.1042	0.1008	0.639	0.684
.002252	86.6	1,235	960	708	0.1049	0.1008	0.639	0.686
.002249	91.1	1,250	991	704	0.1031	0.1011	0.692	0.706
.002249	90.1	1,250	964	700	0.1028	0.1003	0.653	0.700
.002249	83.7	1,300	964	691	0.0995	0.0975	0.710	0.710
.002249	84.6	1,300	981	684	0.0990	0.0991	0.712	0.711
.002248	104.8	1,310	987	652	0.0938	0.0956	0.731	0.739
.002248	103.5	1,310	981	651	0.0933	0.0980	0.772	0.735
.002248	103.1	1,270	932	574	0.0875	0.0938	0.795	0.741
.002248	103.4	1,260	881	574	0.0889	0.0952	0.804	0.750
.002248	102.8	1,200	803	516	0.0870	0.0970	0.829	0.771
.002249	103.1	1,205	804	514	0.0870	0.0950	0.819	0.767
.002249	102.7	1,180	716	445	0.0815	0.0914	0.865	0.773
.002249	102.6	1,185	619	372	0.0760	0.0870	0.908	0.738
.002249	102.4	1,185	619	371	0.0745	0.0870	0.909	0.761
.002249	102.3	1,040	524	301	0.0685	0.0834	0.964	0.792
.002249	102.3	1,040	524	301	0.0685	0.0834	0.964	0.792
.002249	102.4	1,000	476	268	0.0660	0.0812	1.002	0.810
.002249	101.6	940	390	208	0.0584	0.0767	1.003	0.817
.002249	101.7	940	388	207	0.0577	0.0777	1.005	0.809
.002249	101.8	900	330	167	0.0509	0.0700	1.101	0.800
.002249	101.5	900	330	166	0.0514	0.0700	1.104	0.812
.002249	102.0	940	204	91	0.0342	0.0344	1.226	0.735
.002249	101.9	1,200	330	37	0.0345	0.0356	1.340	0.533
.002249	101.8	1,200	321	37	-0.0084</			

TABLE I.—OBSERVED TEST DATA—Continued

Propeller No. 3792. Diameter, 8 feet 6 inches

SET AT 12° AT 0.75 R.

<i>P</i>	<i>V</i> m. p. h.	<i>N</i> r. p. m.	<i>Q</i> lb. ft.	<i>T</i> lb.	<i>C_T</i>	<i>C_P</i>	<i>V</i> <i>nD</i>	η
.002342	101.3	2,050	428	420	0.0286	0.0215	0.504	0.670
.002342	101.6	2,050	428	420	0.0286	0.0214	0.505	0.675
.002342	101.8	1,970	344	315	0.0239	0.0194	0.535	0.660
.002342	101.7	1,874	289	235	0.0198	0.0179	0.561	0.618
.002344	101.8	1,775	231	161	0.0151	0.0160	0.589	0.556
.002344	101.2	1,660	169	87	0.0093	0.0134	0.631	0.440
.002338	100.9	1,576	115	19	0.0028	0.0101	0.662	0.148
.002338	100.8	1,455	57	-53	0.0074	0.0058	0.716	-
.002338	100.3	1,400	33	-77	-0.0116	0.0084	0.743	-
.002350	84.4	2,100	642	641	0.0427	0.0267	0.416	0.665
.002350	84.6	2,105	543	644	0.0428	0.0266	0.416	0.666
.002342	53.0	1,785	340	361	0.0333	0.0232	0.481	0.690
.002339	57.6	2,103	588	623	0.0415	0.0265	0.431	0.676
.002339	87.9	2,105	536	625	0.0416	0.0264	0.432	0.681
.002339	86.3	1,790	311	309	0.0284	0.0211	0.499	0.671
.002339	90.3	2,100	311	584	0.0390	0.0282	0.445	0.689
.002339	90.2	2,100	511	580	0.0388	0.0252	0.445	0.685
.002330	93.8	2,105	508	563	0.0376	0.0251	0.459	0.636
.002330	93.1	2,100	507	561	0.0378	0.0252	0.459	0.635
.002333	80.1	2,100	575	714	0.0479	0.0285	0.895	0.664
.002333	80.4	2,100	577	713	0.0478	0.0286	0.896	0.662
.002333	77.7	1,800	381	400	0.0365	0.0243	0.447	0.671
.002336	75.9	2,086	567	718	0.0498	0.0285	0.376	0.644
.002336	75.9	2,085	570	723	0.0491	0.0286	0.376	0.646
.002336	73.5	1,810	380	450	0.0406	0.0253	0.420	0.574
.002336	69.7	2,105	622	830	0.0554	0.0307	0.243	0.619
.002336	69.4	2,100	622	829	0.0556	0.0308	0.242	0.618
.002339	67.6	1,785	360	496	0.0450	0.0267	0.392	0.661
.002339	65.1	2,100	649	887	0.0594	0.0321	0.321	0.644
.002339	65.0	2,100	649	893	0.0507	0.0321	0.320	0.595
.002339	62.2	1,790	415	542	0.0489	0.0283	0.380	0.635
.002339	57.9	2,080	649	981	0.0336	0.027	0.288	0.560
.002339	57.8	2,080	650	984	0.0337	0.0278	0.288	0.569
.002339	57.5	1,800	436	597	0.0444	0.0294	0.330	0.610
.002343	54.6	2,115	670	985	0.0408	0.0268	0.267	0.580
.002343	55.9	2,115	672	983	0.0467	0.0327	0.274	0.642
.002343	52.8	1,785	430	611	0.0365	0.0293	0.306	0.590
.002349	25.2	2,100	762	1,270	0.0845	0.0374	1.24	0.281
.002349	26.5	2,100	761	1,280	0.0851	0.0373	1.26	0.287
.002349	20.9	1,800	495	899	0.0814	0.0331	1.20	0.295

Propeller No. 3792. Diameter, 8 feet 6 inches

SET AT 23° AT 0.75 R.

<i>P</i>	<i>V</i> m. p. h.	<i>N</i> r. p. m.	<i>Q</i> lb. ft.	<i>T</i> lb.	<i>C_T</i>	<i>C_P</i>	<i>V</i> <i>nD</i>	η
0.002330	84.6	1,640	1,032	926	0.1018	0.0810	0.534	0.643
0.002330	83.8	1,640	1,030	928	0.1021	0.0833	0.529	0.616
0.002337	87.4	1,636	1,032	914	0.0958	0.0828	0.547	0.633
0.002337	88.1	1,635	1,030	910	0.0935	0.0824	0.561	0.659
0.002334	91.9	1,636	1,031	897	0.0965	0.0819	0.578	0.678
0.002334	91.9	1,636	1,032	891	0.0960	0.0816	0.572	0.673
0.002316	94.2	1,636	1,032	889	0.0932	0.0824	0.567	0.653
0.002316	94.0	1,635	1,026	884	0.0936	0.0822	0.566	0.653
0.002318	103.0	1,635	1,028	852	0.0897	0.0797	0.538	0.718
0.002318	102.9	1,630	1,030	853	0.0890	0.0794	0.537	0.704
0.002313	102.3	1,610	921	751	0.0865	0.0782	0.538	0.720
0.002313	102.0	1,610	923	754	0.0868	0.0785	0.538	0.720
0.002313	101.6	1,525	759	610	0.0782	0.0727	0.560	0.742
0.002313	101.8	1,525	769	608	0.0779	0.0727	0.562	0.741
0.002304	101.5	1,430	631	521	0.0761	0.0684	0.783	0.517
0.002304	101.6	1,355	544	593	0.0640	0.0655	0.778	0.516
0.002304	102.1	1,355	544	593	0.0640	0.0653	0.780	0.512
0.002304	102.3	1,250	436	302	0.0578	0.0618	0.847	0.792
0.002304	102.0	1,250	436	301	0.0576	0.0618	0.844	0.788
0.002304	101.6	1,170	328	210	0.0599	0.0530	0.828	0.777
0.002304	101.6	1,170	326	206	0.0490	0.0526	0.806	0.768
0.002304	100.5	1,020	182	106	0.0304	0.0520	0.820	0.804
0.002304	100.2	950	118	48	0.0159	0.0384	1.053	0.611
0.002304	100.6	870	59	4	0.0015	0.0172	1.197	0.103
0.002304	100.5	820	3	-30	-0.0133	0.0093	1.269	-
0.002318	81.0	1,640	1,032	945	0.1047	0.0848	0.511	0.634
0.002318	81.2	1,640	1,028	944	0.1046	0.0841	0.512	0.637
0.002318	77.1	1,630	1,032	944	0.1031	0.0859	0.490	0.618
0.002318	77.9	1,625	1,028	934	0.1076	0.0859	0.498	0.622
0.002318	72.8	1,630	1,030	932	0.1100	0.0853	0.485	0.594
0.002316	71.0	1,630	1,030	938	0.1107	0.0855	0.451	0.585
0.002316	66.1	1,630	1,030	1,023	0.1146	0.0858	0.420	0.561
0.002316	66.0	1,620	1,030	1,014	0.1151	0.0843	0.422	0.562
0.002319	56.0	1,620	1,030	1,070	0.1213	0.0869	0.368	0.501
0.002319	58.0	1,610	1,033	1,057	0.1214	0.0878	0.372	0.514
0.002329	24.5	1,590	1,030	1,075	0.1254	0.0974	0.159	0.225
0.002329	25.3	1,590	1,030	1,071	0.1261	0.0982	0.163	0.233

Propeller No. 3792. Diameter, 8 feet 6 inches

SET AT 28° AT 0.75 R.

<i>P</i>	<i>V</i> m. p. h.	<i>N</i> r. p. m.	<i>Q</i> lb. ft.	<i>T</i> lb.	<i>C_T</i>	<i>C_P</i>	<i>V</i> <i>nD</i>	η
0.002344	84.6	1,410	1,027	793	0.1175	0.1121	0.621	0.650
0.002344	83.2	1,405	1,024	791	0.1190	0.1129	0.613	0.641
0.002344	86.7	1,410	1,027	784	0.1159	0.1121	0.634	0.658
0.002344	84.5	1,410	1,026	779	0.1154	0.1121	0.631	0.652
0.002332	90.6	1,415	1,034	773	0.1142	0.1130	0.662	0.703
0.002332	91.4	1,415	1,030	767	0.1127	0.1128	0.668	0.703
0.002332	94.0	1,421	1,034	760	0.1115	0.1123	0.653	0.707
0.002332	103.9	1,440	1,029	728	0.1030	0.1033	0.745	0.712
0.002326	103.6	1,435	1,024	720	0.1038	0.1039	0.741	0.714
0.002326	103.4	1,400	935	638	0.1039	0.1033	0.763	0.723
0.002326	103.4	1,400	935	638	0.1039	0.1033	0.763	0.727
0.002325	103.4	1,400	935	638	0.1043	0.1038	0.765	0.727
0.002318	103.2	1,350	835	608	0.0998	0.1071	0.792	0.736
0.002318	103.2	1,350	835	604	0.0988	0.1071	0.792	0.736
0.002318	103.1	1,300	833	561	0.0988	0.1082	0.821	0.749
0.002318	103.1	1,305	833	560	0.0980	0.1080	0.819	0.744
0.002318	102.5	1,250	733	470	0.0986	0.1018	0.849	0.742
0.002318	102.9	1,240	729	470	0.0910	0.1033	0.850	0.766
0.002318	102.5	1,190	643	408	0.0859	0.1000	0.893	0.766
0.002318	102.6	1,200	647	413	0.0857	0.0993	0.884	0.761
0.002318	102.4	1,150	575	385	0.0799	0.0957	0.921	0.769
0.002318	102.1	1,100	481	288	0.0709	0.0875	0.960	0.782
0.002318	102.0	1,100	452	284	0.0709	0.0876	0.959	0.775
0.002318	101.7	1,055	469	266	0.0713	0.0903	0.903	0.764
0.002313	101.6	1,065	468	276	0			

TABLE I.—OBSERVED TEST DATA—Continued

Propeller No. 8792. Diameter, 8 feet
SET AT 17° AT 0.75 R.

<i>P</i>	<i>V</i> m.p.h.	<i>N</i> r.p.m.	<i>Q</i> lb. ft.	<i>T</i> lb.	<i>C_T</i>	<i>C_P</i>	<i>V</i> <i>nD</i>	<i>η</i>
0.002317	103.3	2,285	440	466	0.0339	0.0252	0.458	0.670
.002317	103.0	2,210	390	401	0.0312	0.0233	0.514	0.673
.002308	102.5	2,090	325	300	0.0261	0.0223	0.540	0.631
.002308	101.8	2,000	272	233	0.0224	0.0203	0.580	0.611
.002308	101.4	1,910	223	173	0.0180	0.0187	0.585	0.583
.002308	101.7	1,800	173	103	0.0121	0.0159	0.620	0.470
.002308	100.9	1,600	95	0	0	0.0111	0.680	
.002308	101.4	1,600	95	0	0	0.0111	0.686	
.002308	101.0	1,515	59	-45	-0.0079	0.0077	0.734	
.002308	101.0	1,495	-26	-0.0185	0.0208	0.700		
.002316	84.3	2,180	445	550	0.0333	0.0281	0.425	0.663
.002316	82.6	2,165	450	554	0.0343	0.0287	0.420	0.656
.002316	82.1	1,890	290	325	0.0349	0.0244	0.490	0.687
.002316	86.4	2,215	467	664	0.0433	0.0283	0.427	0.657
.002316	86.6	2,215	468	566	0.0437	0.0285	0.431	0.661
.002305	90.1	2,200	441	511	0.0402	0.0273	0.451	0.664
.002305	90.5	2,200	441	517	0.0407	0.0274	0.452	0.671
.002305	92.2	2,200	445	500	0.0323	0.0274	0.466	0.668
.002305	93.4	2,220	447	505	0.0394	0.0271	0.462	0.664
.002305	77.7	2,170	474	606	0.0490	0.0301	0.394	0.642
.002305	76.6	2,180	474	615	0.0492	0.0299	0.387	0.633
.002305	75.4	1,900	330	390	0.0411	0.0272	0.436	0.659
.002305	72.6	2,200	510	684	0.0533	0.0316	0.363	0.619
.002305	73.4	2,200	512	683	0.0533	0.0316	0.367	0.624
.002305	72.6	1,920	346	424	0.0493	0.0281	0.416	0.649
.002307	70.0	2,205	583	724	0.0561	0.0327	0.349	0.604
.002307	69.1	2,205	583	736	0.0575	0.0327	0.345	0.607
.002307	68.6	1,900	347	440	0.0464	0.0287	0.393	0.614
.002307	67.7	2,190	540	770	0.0612	0.0337	0.320	0.682
.002307	63.1	2,200	512	783	0.0614	0.0314	0.316	0.561
.002307	61.9	1,395	363	495	0.0524	0.0303	0.359	0.621
.002307	60.2	2,200	513	798	0.0627	0.0339	0.301	0.688
.002307	65.5	2,200	543	809	0.0630	0.0349	0.292	0.545
.002310	57.0	1,885	374	584	0.0571	0.0315	0.333	0.603
.002310	50.9	2,200	584	907	0.0713	0.0360	0.264	0.503
.002310	51.4	2,225	585	907	0.0626	0.0352	0.264	0.503
.002310	48.1	1,900	402	609	0.0641	0.0332	0.279	0.539
.002316	24.0	2,200	614	1,121	0.0580	0.0377	0.120	0.261
.002316	24.4	2,205	614	1,111	0.0583	0.0375	0.121	0.260
.002316	20.4	1,900	423	798	0.0539	0.0354	0.118	0.279

Propeller No. 8792. Diameter, 8 feet
SET AT 23° AT 0.75 R.

<i>P</i>	<i>V</i> m.p.h.	<i>N</i> r.p.m.	<i>Q</i> lb. ft.	<i>T</i> lb.	<i>C_T</i>	<i>C_P</i>	<i>V</i> <i>nD</i>	<i>η</i>
0.002310	85.3	1,800	1,012	649	0.1112	0.0933	0.525	0.628
.002310	84.7	1,803	1,010	645	0.1106	0.0926	0.516	0.617
.002310	87.3	1,820	1,008	640	0.1078	0.0908	0.581	0.631
.002310	87.5	1,820	1,009	636	0.1075	0.0908	0.529	0.627
.002297	91.6	1,830	1,010	624	0.1055	0.0901	0.551	0.642
.002297	91.0	1,830	1,010	624	0.1055	0.0907	0.547	0.637
.002297	91.5	1,835	1,012	619	0.1043	0.0903	0.561	0.656
.002297	91.3	1,840	1,012	615	0.1034	0.0899	0.562	0.647
.002294	103.1	1,835	1,007	574	0.0972	0.0852	0.614	0.577
.002294	103.6	1,835	1,005	574	0.0972	0.0850	0.614	0.573
.002294	103.3	1,790	908	776	0.0928	0.0853	0.636	0.593
.002294	103.6	1,790	905	777	0.0929	0.0854	0.637	0.593
.002294	103.0	1,790	794	667	0.0873	0.0856	0.663	0.708
.002287	103.3	1,715	797	667	0.0869	0.0817	0.683	0.704
.002287	102.9	1,635	708	580	0.0852	0.0797	0.682	0.723
.002287	102.6	1,640	709	582	0.0850	0.0792	0.688	0.722
.002287	102.2	1,570	619	424	0.0768	0.0735	0.717	0.728
.002287	102.5	1,570	620	421	0.0768	0.0736	0.719	0.721
.002287	102.9	1,470	518	395	0.0701	0.0723	0.770	0.747
.002287	102.1	1,470	518	397	0.0704	0.0723	0.761	0.746
.002278	102.1	1,400	430	317	0.0623	0.0664	0.807	0.757
.002278	102.4	1,400	430	315	0.0619	0.0664	0.805	0.750
.002278	102.2	1,310	257	247	0.0553	0.0639	0.860	0.760
.002278	102.4	1,315	258	251	0.0553	0.0629	0.857	0.762
.002278	102.2	1,240	303	204	0.0511	0.0598	0.908	0.775
.002278	102.4	1,240	303	205	0.0514	0.0598	0.910	0.781
.002278	101.1	1,150	221	136	0.0596	0.0503	0.977	0.766
.002279	101.3	1,080	156	86	0.0524	0.0420	1.061	0.736
.002279	101.3	1,000	115	46	0.0177	0.0543	1.113	0.567
.002279	101.2	920	55	-11	-0.0555	0.0200	1.211	0.165
.002288	80.4	1,820	1,016	972	0.1125	0.0928	0.486	0.590
.002288	80.5	1,820	1,016	961	0.1126	0.0925	0.473	0.581
.002288	78.3	1,820	1,012	929	0.1160	0.0930	0.457	0.570
.002288	75.4	1,815	1,012	967	0.1160	0.0930	0.455	0.568
.002291	70.1	1,800	1,014	924	0.1211	0.0948	0.429	0.543
.002291	69.3	1,800	1,014	928	0.1215	0.0948	0.427	0.545
.002291	65.3	1,800	1,018	959	0.1230	0.0950	0.388	0.511
.002291	63.1	1,800	1,018	1,057	0.1250	0.0945	0.386	0.509
.002294	59.6	1,795	1,018	1,05	0.1282	0.0952	0.365	0.492
.002294	54.5	1,795	1,018	1,05	0.1314	0.0952	0.334	0.482
.002294	54.8	1,795	1,018	1,00	0.1308	0.0949	0.336	0.484
.002300	25.6	1,780	1,016	1,199	0.1443	0.0964	0.158	0.238
.002300	24.5	1,780	1,012	1,186	0.1428	0.0939	0.159	0.228

Propeller No. 8792. Diameter, 8 feet
SET AT 28° AT 0.75 R.

<i>P</i>	<i>V</i> m.p.h.	<i>N</i> r.p.m.	<i>Q</i> lb. ft.	<i>T</i> lb.	<i>C_T</i>	<i>C_P</i>	<i>V</i> <i>nD</i>	<i>η</i>
0.002298	84.6	1,585	1,011	826	0.1295	0.1243	0.595	0.610
.002298	83.3	1,585	1,008	823	0.1285	0.1247	0.588	0.612
.002298	85.6	1,570	1,012	814	0.1262	0.1235	0.615	0.628
.002298	87.4	1,575	1,008	812	0.1258	0.1222	0.610	0.626
.002298	90.5	1,580	1,011	804	0.1234	0.1218	0.630	0.639
.002298	90.5	1,580	1,011	793	0.1210	0.1212	0.646	0.645
.002298	94.2	1,590	1,012	788	0.1201	0.1210	0.559	0.647
.002298	103.8	1,600	1,015	789	0.1143	0.1200	0.712	0.680
.002298	102.9	1,600	1,011	780	0.1146	0.1192	0.707	0.680
.002298	102.9	1,650	953	708	0.1134	0.1204	0.729	0.690
.002298	103.7	1,555	955	708	0.1132	0.1197	0.732	0.697
.002298	102.9	1,505	845	645	0.1100	0.1186	0.752	0.702
.002298	102.3	1,450	798	589	0.1043	0.1145	0.776	0.708
.002297	102.4	1,400	782	511	0.1007	0.1138	0.805	0.730
.002297	102.3	1,355	674	466	0.0984	0.1115	0.822	0.735
.002297	102.2	1,355	674	464	0.0980	0.1115	0.820	0.730
.002297	102.8	1,300	612	412	0.0945	0.1100	0.849	0.747
.002297	102.5	1,240	519	335	0.0845	0.1023	0.873	0.751
.002297	102.7	1,240	519	336	0.0848	0.1025	0.910	0.754
.002297	102.5	1,170	444	277	0.0734	0.0858	0.964	0.764
.002297	102.4	1,170	444	277	0.0734	0.0858	0.962	0.773
.002								

TABLE II.—FINAL ADJUSTED COEFFICIENTS

Propeller No. 3792. Diameter, 10 feet

12° AT 0.75 R.

$\frac{V}{nD}$	C_T	C_P	η	C_S
0.10	0.0639	0.0269	0.288	0.208
.15	.0622	.0263	.349	.310
.20	.0581	.0260	.447	.415
.25	.0640	.0251	.538	.522
.30	.0490	.0241	.610	.632
.35	.0481	.0228	.663	.746
.40	.0368	.0208	.709	.868
.45	.0294	.0181	.780	1.003
.50	.0219	.0160	.780	1.185
.55	.0145	.0119	.670	1.833
.60	.0086	.0086	.460	1.558

Propeller No. 3792. Diameter, 10 feet

28° AT 0.75 R.

$\frac{V}{nD}$	C_T	C_P	η	C_S
0.10	0.0864	0.0946	0.091	0.1602
.15	.0882	.0819	.139	.242
.20	.0846	.0895	.189	.524
.25	.0838	.0878	.238	.407
.30	.0830	.0843	.289	.490
.35	.0828	.0856	.339	.573
.40	.0822	.0847	.388	.558
.45	.0819	.0835	.440	.740
.50	.0810	.0818	.495	.826
.55	.0799	.0799	.550	.910
.60	.0786	.0780	.605	1.000
.65	.0776	.0766	.650	1.085
.70	.0759	.0752	.708	1.178
.75	.0735	.0742	.742	1.203
.80	.0700	.0728	.769	1.350
.85	.0660	.0710	.790	1.443
.90	.0610	.0632	.805	1.537
.95	.0561	.0651	.818	1.640
1.00	.0508	.0612	.829	1.750
1.05	.0461	.0587	.834	1.885
1.10	.0396	.0522	.835	1.086
1.15	.0340	.0475	.824	2.120
1.20	.0278	.0421	.791	2.260
1.25	.0216	.0364	.740	2.420
1.30	.0151	.0268	.600	2.630
1.35	.0091	.0228	.540	2.880

Propeller No. 3792. Diameter, 10 feet

17° AT 0.75 R.

$\frac{V}{nD}$	C_T	C_P	η	C_S
0.10	0.0868	0.0411	0.211	0.189
.15	.0849	.0411	.306	.284
.20	.0810	.0411	.394	.379
.25	.0771	.0410	.470	.473
.30	.0781	.0405	.541	.569
.35	.0887	.0400	.601	.665
.40	.0685	.0390	.651	.768
.45	.0578	.0374	.695	.868
.50	.0512	.0350	.731	.977
.55	.0448	.0320	.761	1.002
.60	.0372	.0286	.782	1.220
.65	.0304	.0250	.790	1.256
.70	.0282	.0211	.770	1.515
.75	.0182	.0171	.711	1.691
.80	.0056	.0129	.588	1.008
.85	.0027	.0082	.280	2.220

Propeller No. 3792. Diameter, 9 feet 6 inches

12° AT 0.75 R.

$\frac{V}{nD}$	C_T	C_P	η	C_S
0.10	0.0739	0.0308	0.240	0.200
.15	.0701	.0303	.337	.302
.20	.0658	.0298	.441	.404
.25	.0607	.0290	.524	.507
.30	.0550	.0277	.596	.616
.35	.0494	.0260	.661	.728
.40	.0411	.0238	.691	.845
.45	.0332	.0210	.711	.974
.50	.0264	.0179	.710	1.118
.55	.0178	.0146	.670	1.282
.60	.0098	.0111	.530	1.477
.65	.0019	.0076	.168	1.723

Propeller No. 3792. Diameter, 10 feet

28° AT 0.75 R.

$\frac{V}{nD}$	C_T	C_P	η	C_S
0.10	0.0801	0.0670	0.120	0.172
.15	.0802	.0649	.186	.259
.20	.0803	.0630	.255	.348
.25	.0803	.0616	.325	.437
.30	.0802	.0602	.400	.527
.35	.0802	.0594	.472	.616
.40	.0800	.0590	.541	.705
.45	.0790	.0588	.605	.793
.50	.0770	.0584	.660	.853
.55	.0737	.0579	.700	.978
.60	.0690	.0563	.736	1.067
.65	.0640	.0546	.761	1.162
.70	.0581	.0520	.782	1.265
.75	.0519	.0485	.801	1.372
.80	.0451	.0445	.812	1.490
.85	.0388	.0401	.810	1.615
.90	.0321	.0355	.812	1.754
.95	.0258	.0310	.790	1.903
1.00	.0191	.0258	.740	2.030
1.05	.0128	.0203	.658	2.200
1.10	.0061	.0134	.500	2.610

Propeller No. 3792. Diameter, 9 feet 6 inches

17° AT 0.75 R.

$\frac{V}{nD}$	C_T	C_P	η	C_S
0.10	0.0938	0.0466	0.201	0.1845
.15	.0914	.0466	.264	.277
.20	.0883	.0463	.382	.389
.25	.0850	.0461	.461	.463
.30	.0810	.0458	.530	.557
.35	.0763	.0452	.591	.650
.40	.0714	.0445	.641	.745
.45	.0659	.0434	.682	.843
.50	.0589	.0406	.720	.950
.55	.0500	.0368	.748	1.063
.60	.0415	.0324	.768	1.190
.65	.0382	.0280	.770	1.330
.70	.0284	.0235	.755	1.480
.75	.0180	.0191	.705	1.653
.80	.0102	.0148	.589	1.853
.85	.0040	.0100	.340	2.130

TABLE II.—FINAL ADJUSTED COEFFICIENTS—Continued

Propeller No. 3792. Diameter, 9 feet 6 inches

23° AT 0.75 R.

$\frac{V}{nD}$	C_T	C_P	γ	C_S
0.10	0.0956	0.0780	0.123	0.157
.15	.0955	.0758	.189	.251
.20	.0943	.0738	.253	.337
.25	.0911	.0720	.320	.423
.30	.0849	.0704	.406	.510
.35	.0943	.0691	.477	.597
.40	.0934	.0681	.549	.685
.45	.0916	.0679	.607	.771
.50	.0852	.0672	.655	.857
.55	.0837	.0665	.691	.945
.60	.0781	.0650	.721	1.035
.65	.0721	.0627	.746	1.130
.70	.0669	.0599	.769	1.230
.75	.0693	.0564	.789	1.333
.80	.0621	.0521	.800	1.447
.85	.0456	.0490	.808	1.557
.90	.0383	.0429	.803	1.686
.95	.0316	.0379	.792	1.826
1.00	.0248	.0323	.767	1.983
1.05	.0178	.0262	.713	2.170
1.10	.0110	.0198	.613	2.410
1.15	.0041	.0121	.390	2.780

Propeller No. 3792. Diameter, 9 feet

17° AT 0.75 R.

$\frac{V}{nD}$	C_T	C_P	γ	C_S
0.10	0.1002	0.0519	0.193	0.181
.15	.0985	.0519	.285	.271
.20	.0961	.0518	.371	.361
.25	.0929	.0517	.446	.442
.30	.0886	.0512	.516	.513
.35	.0837	.0508	.577	.585
.40	.0775	.0493	.627	.620
.45	.0700	.0476	.663	.627
.50	.0622	.0444	.701	.631
.55	.0545	.0409	.733	1.042
.60	.0459	.0366	.753	1.163
.65	.0372	.0319	.788	1.296
.70	.0289	.0271	.747	1.440
.75	.0212	.0228	.713	1.606
.80	.0138	.0174	.635	1.800
.85	.0065	.0127	.435	2.040

Propeller No. 3792. Diameter, 9 feet 6 inches

28° AT 0.75 R.

$\frac{V}{nD}$	C_T	C_P	γ	C_S
0.10	0.1040	0.1130	0.092	0.1544
.15	.1020	.1105	.138	.2330
.20	.1000	.1081	.185	.312
.25	.0980	.1050	.233	.392
.30	.0970	.1025	.284	.474
.35	.0956	.1002	.334	.554
.40	.0950	.0980	.388	.637
.45	.0950	.0969	.441	.718
.50	.0949	.0952	.499	.802
.55	.0944	.0939	.553	.883
.60	.0940	.0927	.608	.965
.65	.0925	.0915	.656	1.050
.70	.0900	.0897	.702	1.133
.75	.0866	.0881	.737	1.220
.80	.0819	.0863	.761	1.307
.85	.0771	.0839	.781	1.395
.90	.0715	.0805	.800	1.490
.95	.0653	.0765	.810	1.590
1.00	.0585	.0714	.820	1.695
1.05	.0520	.0665	.822	1.804
1.10	.0455	.0613	.818	1.920
1.15	.0392	.0558	.807	2.050
1.20	.0328	.0497	.788	2.190
1.25	.0260	.0430	.756	2.340
1.30	.0195	.0361	.702	2.520
1.35	.0131	.0289	.613	2.740
1.40	.0066	.0212	.435	3.020

Propeller No. 3792. Diameter, 9 feet

23° AT 0.75 R.

$\frac{V}{nD}$	C_T	C_P	γ	C_S
0.10	0.1095	0.0876	0.125	0.163
.15	.1095	.0830	.193	.247
.20	.1091	.0794	.275	.332
.25	.1089	.0776	.351	.417
.30	.1083	.0767	.425	.501
.35	.1068	.0760	.493	.586
.40	.1041	.0758	.550	.671
.45	.1002	.0755	.597	.754
.50	.0959	.0752	.637	.838
.55	.0903	.0736	.674	.928
.60	.0845	.0718	.706	1.015
.65	.0775	.0690	.730	1.110
.70	.0704	.0665	.763	1.207
.75	.0635	.0618	.770	1.310
.80	.0565	.0577	.783	1.416
.85	.0492	.0530	.791	1.533
.90	.0421	.0490	.790	1.653
.95	.0352	.0426	.780	1.786
1.00	.0279	.0368	.757	1.933
1.05	.0208	.0304	.719	2.110
1.10	.0139	.0241	.633	2.310
1.15	.0070	.0179	.450	2.570

Propeller No. 3792. Diameter, 9 feet

28° AT 0.75 R.

$\frac{V}{nD}$	C_T	C_P	γ	C_S
0.10	0.1140	0.1246	0.0915	0.148
.15	.1140	.1239	.138	.226
.20	.1140	.1227	.186	.304
.25	.1125	.1220	.282	.391
.30	.1120	.1208	.282	.498
.35	.1127	.1177	.335	.587
.40	.1120	.1148	.391	.617
.45	.1086	.1099	.449	.700
.50	.1072	.1051	.510	.784
.55	.1063	.1028	.569	.868
.60	.1064	.1013	.630	.949
.65	.1055	.1010	.678	1.030
.70	.1015	.1000	.710	1.110
.75	.0968	.0990	.730	1.193
.80	.0903	.0966	.748	1.277
.85	.0840	.0934	.766	1.367
.90	.0779	.0900	.781	1.457
.95	.0717	.0857	.795	1.555
1.00	.0652	.0812	.804	1.653
1.05	.0585	.0768	.810	1.760
1.10	.0519	.0708	.806	1.867
1.15	.0451	.0652	.796	1.966
1.20	.0377	.0578	.782	2.120
1.25	.0302	.0492	.764	2.280
1.30	.0226	.0403	.705	2.470
1.35	.0160	.0330	.614	2.660
1.40	.0076	.0245	.430	2.940

Propeller No. 3792. Diameter, 9 feet

12° AT 0.75 R.

$\frac{V}{nD}$	C_T	C_P	γ	C_S
0.10	0.0827	0.0339	0.244	0.197
.15	.0767	.0331	.248	.206
.20	.0707	.0321	.440	.307
.25	.0642	.0310	.617	.501
.30	.0582	.0299	.688	.605
.35	.0610	.0279	.640	.717
.40	.0439	.0268	.679	.829
.45	.0361	.0232	.700	.955
.50	.0272	.0199	.702	1.095
.55	.0199	.0168	.650	1.245
.60	.0115	.0131	.526	1.430
.65	.0034	.0094	.235	1.655

TABLE II.—FINAL ADJUSTED COEFFICIENTS—Continued

Propeller No. 3792. Diameter, 8 feet 6 inches

12° AT 0.75 R.

$\frac{V}{nD}$	C_T	C_P	η	C_S
0.10	0.0685	0.0879	0.234	0.192
.15	.0286	.0370	.335	.290
.20	.0789	.0867	.425	.389
.25	.0688	.0842	.503	.491
.30	.0619	.0826	.571	.595
.35	.0545	.0806	.622	.703
.40	.0484	.0780	.661	.816
.45	.0434	.0742	.688	.940
.50	.0383	.0722	.683	1.072
.55	.0217	.0188	.635	1.219
.60	.0181	.0150	.524	1.390
.65	.0046	.0112	.288	1.595

Propeller No. 3792. Diameter, 8 feet 6 inches

28° AT 0.75 R.

$\frac{V}{nD}$	C_T	C_P	η	C_S
0.10	0.1308	0.1450	0.090	0.147
.15	.1290	.1410	.137	.222
.20	.1271	.1369	.186	.298
.25	.1257	.1380	.236	.375
.30	.1243	.1288	.290	.453
.35	.1233	.1249	.316	.532
.40	.1222	.1211	.404	.610
.45	.1220	.1167	.470	.690
.50	.1223	.1133	.510	.771
.55	.1231	.1130	.600	.850
.60	.1198	.1128	.637	.928
.65	.1149	.1126	.682	1.006
.70	.1100	.1115	.690	1.086
.75	.1048	.1097	.715	1.167
.80	.0962	.1087	.737	1.252
.85	.0911	.1029	.733	1.339
.90	.0843	.0989	.768	1.432
.95	.0772	.0942	.779	1.525
1.00	.0703	.0893	.787	1.623
1.05	.0632	.0835	.795	1.726
1.10	.0560	.0770	.800	1.837
1.15	.0483	.0696	.797	1.956
1.20	.0410	.0624	.789	2.090
1.25	.0338	.0541	.773	2.240
1.30	.0260	.0462	.780	2.400
1.35	.0183	.0376	.654	2.600
1.40	.0108	.0293	.515	2.830
1.45	.0031	.0212	.210	3.130

Propeller No. 3792. Diameter, 8 feet 6 inches

17° AT 0.75 R.

$\frac{V}{nD}$	C_T	C_P	η	C_S
0.10	0.1117	0.0610	0.183	0.175
.15	.1087	.0598	.272	.294
.20	.1046	.0589	.335	.382
.25	.1008	.0577	.435	.443
.30	.0958	.0572	.502	.582
.35	.0901	.0565	.589	.622
.40	.0838	.0549	.610	.716
.45	.0758	.0525	.650	.818
.50	.0672	.0489	.687	.913
.55	.0581	.0445	.718	1.026
.60	.0495	.0399	.744	1.143
.65	.0410	.0350	.761	1.271
.70	.0380	.0305	.787	1.406
.75	.0246	.0284	.724	1.564
.80	.0170	.0210	.648	1.783
.85	.0092	.0161	.485	1.942
.90	.0016	.0113	.128	2.210

Propeller No. 3792. Diameter, 8 feet 6 inches

23° AT 0.75 R.

$\frac{V}{nD}$	C_T	C_P	η	C_S
0.10	0.1267	0.0899	0.141	0.162
.15	.1260	.0896	.211	.243
.20	.1261	.0891	.283	.324
.25	.1261	.0887	.355	.404
.30	.1249	.0881	.428	.457
.35	.1228	.0876	.490	.570
.40	.1178	.0869	.541	.652
.45	.1120	.0861	.585	.735
.50	.1065	.0852	.625	.818
.55	.0997	.0832	.660	.904
.60	.0930	.0808	.690	.994
.65	.0859	.0774	.720	1.085
.70	.0785	.0738	.745	1.181
.75	.0710	.0699	.768	1.278
.80	.0632	.0660	.778	1.383
.85	.0553	.0600	.784	1.495
.90	.0478	.0541	.785	1.613
.95	.0393	.0480	.778	1.743
1.00	.0315	.0420	.750	1.885
1.05	.0233	.0362	.698	2.000
1.10	.0156	.0286	.599	2.240
1.15	.0075	.0229	.376	2.500

Propeller No. 3792. Diameter, 8 feet

12° AT 0.75 R.

$\frac{V}{nD}$	C_T	C_P	η	C_S
0.10	0.0600	0.0880	0.287	0.192
.15	.0841	.0879	.334	.288
.20	.0779	.0866	.425	.387
.25	.0705	.0853	.500	.487
.30	.0635	.0840	.561	.590
.35	.0562	.0822	.610	.696
.40	.0488	.0802	.646	.805
.45	.0407	.0724	.669	.923
.50	.0330	.0647	.688	1.047
.55	.0244	.0516	.623	1.186
.60	.0155	.0179	.520	1.343
.65	.0065	.0140	.302	1.528

Propeller No. 3792. Diameter, 8 feet

17° AT 0.75 R.

$\frac{V}{nD}$	C_T	C_P	η	C_S
0.10	0.1218	0.0656	0.185	0.172
.15	.1179	.0648	.272	.259
.20	.1133	.0639	.358	.346
.25	.1081	.0630	.429	.435
.30	.1025	.0622	.494	.523
.35	.0959	.0613	.547	.612
.40	.0890	.0600	.604	.703
.45	.0811	.0575	.635	.794
.50	.0726	.0540	.678	.897
.55	.0632	.0491	.707	1.006
.60	.0535	.0442	.728	1.120
.65	.0447	.0392	.740	1.242
.70	.0343	.0362	.738	1.361
.75	.0285	.0294	.728	1.520
.80	.0200	.0243	.659	1.680
.85	.0113	.0193	.498	1.872
.90	.0030	.0145	.186	2.110

TABLE II.—FINAL ADJUSTED COEFFICIENTS—Continued

Propeller No. 3792. Diameter, 8 feet

23° AT 0.75 R.

$\frac{V}{nD}$	C_T	C_P	γ	C_x
0.10	0.1466	0.0967	0.182	0.160
.15	.1441	.0961	.225	.240
.20	.1412	.0953	.295	.320
.25	.1378	.0954	.360	.400
.30	.1340	.0952	.423	.491
.35	.1297	.0950	.477	.561
.40	.1246	.0950	.524	.641
.45	.1187	.0943	.586	.723
.50	.1123	.0929	.604	.805
.55	.1055	.0907	.630	.889
.60	.0979	.0874	.672	.979
.65	.0893	.0821	.702	1.072
.70	.0820	.0793	.723	1.163
.75	.0738	.0746	.741	1.262
.80	.0659	.0699	.783	1.364
.85	.0580	.0644	.785	1.470
.90	.0510	.0595	.772	1.585
.95	.0432	.0533	.770	1.709
1.00	.0361	.0473	.766	1.805
1.05	.0285	.0419	.715	1.960
1.10	.0207	.0351	.650	2.160
1.15	.0128	.0264	.518	2.830
1.20	.0060	.0218	.276	2.860

Propeller No. 3792. Diameter, 8 feet

28° AT 0.75 R.

$\frac{V}{nD}$	C_T	C_P	γ	C_x
0.10	0.1437	0.1513	0.096	0.146
.15	.1413	.1473	.144	.220
.20	.1393	.1435	.194	.395
.25	.1379	.1397	.247	.371
.30	.1368	.1359	.302	.447
.35	.1363	.1321	.361	.526
.40	.1370	.1286	.426	.606
.45	.1380	.1252	.496	.682
.50	.1385	.1245	.543	.758
.55	.1322	.1242	.585	.835
.60	.1278	.1238	.619	.911
.65	.1223	.1225	.649	.987
.70	.1163	.1210	.673	1.067
.75	.1099	.1177	.700	1.151
.80	.1023	.1187	.720	1.237
.85	.0951	.1091	.742	1.325
.90	.0880	.1043	.760	1.414
.95	.0805	.0992	.771	1.508
1.00	.0732	.0942	.776	1.605
1.05	.0659	.0890	.775	1.703
1.10	.0586	.0832	.776	1.811
1.15	.0511	.0767	.766	1.920
1.20	.0435	.0699	.748	2.045
1.25	.0359	.0620	.723	2.180
1.30	.0282	.0533	.674	2.330
1.35	.0203	.0448	.610	2.515
1.40	.0125	.0360	.487	2.720
1.45	.0043	.0289	.248	2.990